

Much more than an eyepiece HYPERION®-eyepieces

How to use the modular eyepiece system – illustrated instructions for the whole range of Hyperion accessories



Free case
with purchase of
7pc eyepiece set

Individually packaged
Hyperion eyepieces:



Scope of supply for each
Hyperion 68°-eyepiece (1-5):

dual
2" and 1¼"
nosepiece

Soft-leather bag
provides perfect
protection – takes very
little space

1¼" (31,7mm) Ø
Dust Cap

Two end dust caps with
inner diameters of 48mm and 45mm

End dust caps

All Hyperion eyepieces are equipped with two dust caps which protect the eye lens side. This leaves you the choice of storing the eyepiece protected from dust with rubber eye cap folded down (especially for persons who wear glasses) or folded up.

System-threads M 43 and SP 54

The Hyperion threads are located beneath the rubber eye cap, or rather beneath the thread-protecting ring (made of high-quality, non-aging silicone rubber). The large number of Baader adapter rings allows use of the Hyperion eyepiece for (almost) every task in astronomical – and nature – photography as a high-quality projection optic or as a tele-extender.

The following pages describe in detail many of the adaptations and variations that are possible with the Hyperion system.



1 System thread M43



2 System thread SP54



1¼" barrel with captive groove and filter thread, suitable for all 1¼" eyepiece-filters, as well as for the Baader 1¼" extension tube (#1905130)

2" draw tube diameter with
captive groove and 2" filter thread

Variable focal lengths with the Hyperion 2" finetuning rings (FTR) 14 and 28 mm




Hyperion eyepiece with
FTR 14 and 28 mm

Hyperion eyepiece with FTR 14mm
(this combination is also portrayed in
the picture below which features the
2" mirror star diagonal)

Available combinations of Hyperion eyepieces with Finetuning Rings or 2" Baader Filter to modify the focal length and the field of view.

	Effective focal length in mm	Ø Field-stop mm	with 14 mm FTR	with 28 mm FTR	with 14 + 28 mm FTR	with 2" Baader Filter*	without first group of lenses
Hyperion**	24.0	28.0	--	--	--	--	--
Hyperion	21.0	22.5	17.6	19.9	15.5	17.5	14.0
Hyperion	17.0	20.9	13.1	17.1	10.8	14.1	9.2
Hyperion	13.0	17.7	10.8	14.6	9.2	12.5	8.1
Hyperion	10.0	15.0	8.4	11.6	7.1	9.8	6.1
Hyperion	8.0	10.7	6.0	8.6	5.0	7.1	4.3
Hyperion	5.0	6.5	4.0	5.4	3.2	4.5	2.6

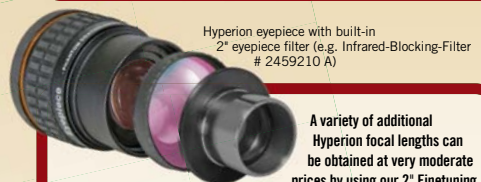

Hyperion eyepiece with built-in
2" eyepiece filter (e.g. Infrared-Blocking-Filter
2459210 A)

A variety of additional
Hyperion focal lengths can
be obtained at very moderate
prices by using our 2" Finetuning
Extension Rings 14 and 28 mm, or even
our 2" eyepiece filters. Thus an eyepiece of 5 mm focal length can be converted into one of 2.6 mm focal length – without loss of sharpness – above all, because no additional lenses are introduced into the beam, which is unavoidable when using a Barlow lens.

For marginal cost such experimentation is possible. You will discover how much your telescope can achieve, exceeding the recommended range of magnification without an additional Barlow lens. You will experience surprising results especially with refractors. With real apochromats the usable exit pupil may be considerably smaller than the literature recommends!

* Baader 2" eyepiece filter with a height of 8 mm. Yellow column of the table: focal length, Light-Gray column: diameter of the field stop
** non variable focal length

Hyperion eyepiece
with 1¼" barrel
unscrewed

Finetuning
2" Extension ring
28 mm # 2958228

Finetuning
2" Extension ring
14 mm # 2958214

2" Stop ring with
captive brass locking
ring and two locking
screws # 2958027

Front Hyperion lens element,
built into the 1¼" barrel.

The M48 filter thread is located here!

To remove the first group of lenses,
all Hyperion eyepieces must only be
opened here (exception 24 mm).
Disassembling the eyepiece elsewhere
will void the warranty!

Combination of the Hyperion
eyepiece and the 14 mm
Finetuning Ring as well as the
2" stop ring

The stop ring prevents the eyepiece barrel
from hitting the mirror star diagonal or
prism.



Hyperion eyepiece

2" Stop ring
#2958027

Finetuning ring
14 mm #2958214

1¼" Hyperion barrel with
built-in negative
lens group

Baader ClickLock®,
Astro-Physics
Maxbright Star Diagonal

Adaption of the Hyperion-eyepiece to the Zeiss Diascope spotting scope



Hyperion eyepiece used as Diascope-camera adapter – an excellent substitute for much more expensive Zeiss Diascope Photoadapter

Visual Observation:

The Hyperion 21-/17-13-/8 mm eyepieces may be adapted to the Zeiss spotting scope with the aid of a bayonet-adapter #2454500

Video-camera, e.g. Sony HDV

Hyperion DT-ring SP 54 / M 37
2958037

Hyperion extension DT-ring 11 mm
SP 54i / SP 54 a # 2958090

Hyperion eyepiece

1¼" Baader Diascope bayonet-adapter # 2454500 with built-in captive brass locking ring – slipped over and fastened onto the chromium-plated eyepiece barrel

Carl Zeiss Diascope 85 T*FL

more information:
www.hyperion-okulare.de

The whole family of Hyperion 68° eyepieces:



5 mm
#2454605

8 mm
#2454608

10 mm
#2454610

13 mm
#2454613

17 mm
#2454617

21 mm
#2454621

24 mm
#2454624



BAADER PLANETARIUM™

Zur Sternwarte • D-82291 Mammendorf • Tel. +49 (0) 81 45 / 88 02 • Fax +49 (0) 81 45 / 88 05
Baader-Planetarium.de • kontakt@baader-planetarium.de • Celestron-Deutschland.de

We reserve the right for errors and technical changes • Illustrations may differ slightly from the original • Copyright by Baader Planetarium GmbH • Layout by MB-GRAFIK-DESIGN.
The terms Astro I-2 System® and Hyperion® are copyrighted. Any Use of our brand-names, copying or commercially using our sales-material without our expressive authorisation will be prosecuted.
We reserve all rights.

Hyperion eyepieces classical eyepiece projection

M43/T-2 adapter ring # 2958080 fits the smaller M43 system thread of the Hyperion eyepiece. Thus every Hyperion eyepiece can be used as a classical projection eyepiece. The whole range of adapter rings of our Baader Astro T-2 System® for moon- and planetary photography is available for this purpose. With eyepieces of 5 and 8 mm focal length, highest projection magnifications are easily attained.



Simple alternative to the DSLR T-ring (on the right side): Standard EOS T-ring without dust-seal (# 2408319)

Protective Baader Canon EOS T-ring with built-in dust protection infrared blocking filter # 2958550 L



Optional: T-2 extension tube 15 mm, increases the projection factor (# 1508154)

Optional: T-2 extension tube 40 mm (# 1508153), increases the projection factor

Recommended: T-2 extension tube 7,5 mm # 1508155

Rubber protecting ring for the SP 54 system thread

Hyperion M43/T-2 ring #2958080

SP 54/M 54a Hyperion 11 mm extension ring, with rubber thread-protecting-cover for the SP 54 outer thread # 2958090



2 adjustment Spacer Rings made of hard plastic for the SP 54 thread are part of each Hyperion DT-ring free of charge. With these spacer rings (each ring has a thickness of only 1 mm), differences in mechanical heights may be adjusted, to be able to adapt the camera front lens as close as possible, without having to use the 11 mm Extension ring (# 2958090). Caution when mounting the camera! Camera-front lenses may be too close to the first lens of the Hyperion eyepiece only by a tenth of a millimetre. When mounting the Hyperion-eyepiece onto any camera-front-lens, always proceed with the greatest care, possibly using the additional Spacer rings.

Hyperion eyepieces afocal projection with DSLR-cameras



Using SP 54 connecting rings, the objective of the camera and the Hyperion eyepiece may be connected with a minimum of separation distance.

All adaptation requires careful handling. Before connecting the eyepiece tightly to the camera, please make sure that the lens surface of the camera lens is not touched or scratched by any part of the eyepiece.



Digital DSLR-camera for example: Canon EOS DSLR

Attachment to the camera lens using the Hyperion DT-ring SP 54/M 62 # 2958062

1mm thick spacer ring – optional to prevent contact between the lenses of the eyepiece and the camera lens # 2958001

Hyperion eyepiece system thread SP 54 is exposed by removing the thread-protecting silicone-ring.

Video camera with M 28 filter thread in front of the lens

Hyperion DT-ring SP 54/M 28 # 2958028

Hyperion 11mm long extension ring # 2958090 (required to adapt DT-rings SP 54/M 28 and M 37)

Hyperion eyepiece



3 CCD Video-camera, e.g. Sony HDV


Hyperion DT-ring SP 54/M 37 # 2958037

Hyperion DT-extension ring # 2958090

Hyperion eyepiece, complete, including 1 1/4" barrel

2" to 1 1/4" Reducer #2408190

2" deluxe nose piece with integrated 2" filter holder # 2958144 for adaptation onto Schmidt-Cassegrain telescopes

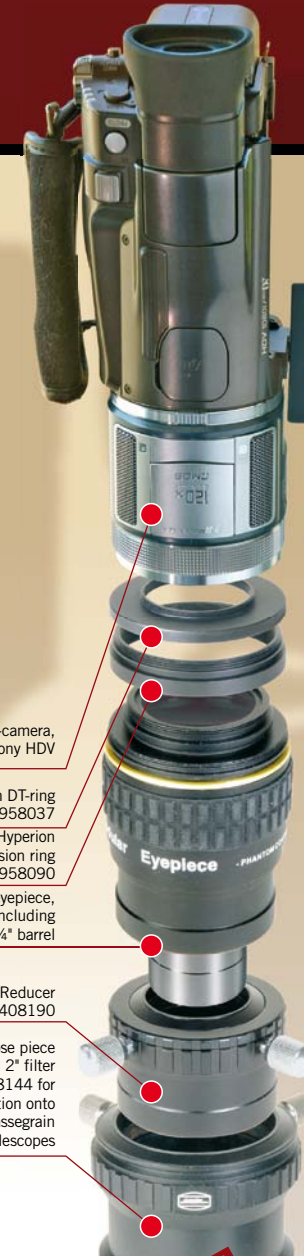

The same assembly as in the picture on the left – but with the first group of lenses removed



Recommendation:

The eyepiece should only be used without the first group of lenses for the purpose of afocal eyepiece projection imaging. The camera's field of view will be increased without a noticeable loss of edge sharpness. In visual observation, however, a loss of edge sharpness will be experienced when using the eyepiece without the first group of lenses.

Caution when mounting the first group of lenses!

The eyepiece may only be opened here. This exposes an M 48 filter thread which is necessary for attaching a 2" eyepiece filter to protect the dust-sensitive inner Hyperion lens surface (for example a 2" Infrared-Blocking-Filter useful for photography)

Baader 2" eyepiece filter (e.g. infrared-blocking filter # 2459210 A)



For adapting to the Astro T-2 System®

Adapter system SP 54 –for afocal Projection:

The Hyperion DT-rings SP 54 are optimized to provide the shortest possible distance between the eye lens of the eyepiece and the digital camera lens. Only in this way is a fully illuminated photographic field possible without vignetting



Please consult our Astro-accessory price list to find further adapter rings, including the Astro T-2 System®.

