

## Verbatim LED GU10 4W 3000K 320lm

### 3000K Warm White 340 LM DIM

- GU10 Socket
- 220-240V
- 50,000 hours Lifetime
- Dimmable
- 91% Energy Saving
- Luminous Flux: 340 lm
- Equivalent to 47W incandescent bulb

**Product Number** **52324**

#### General Data

|             |            |
|-------------|------------|
| Lamp Socket | GU10       |
| Design      | PAR16 GU10 |

#### Electric Data


|                          |         |
|--------------------------|---------|
| Wattage (W)              | 4.0     |
| Wattage Equivalent (W)   | 47      |
| Voltage (V)              | 220-240 |
| Dimmable                 | yes     |
| Power Factor             | 0.65    |
| Operating Frequency (Hz) | 50/60   |

#### Geometric Data

|               |    |
|---------------|----|
| Length (mm)   | 56 |
| Diameter (mm) | 50 |
| Weight (g)    | 55 |



#### Photometric Data

|                             |         |
|-----------------------------|---------|
| Luminous Flux (lm)          | 340     |
| Luminous Flux 90° Cone (lm) | 320     |
| CRI                         | 80      |
| CCT (K)                     | 3000    |
| Luminous Intensity (cd)     | 770     |
| Beam Angle (°)              | 35      |
| Luminous Efficacy (lm/W)    | 85      |
| Lifetime (hrs)              | 50,000  |
| Switching Cycle             | 100,000 |




19/10/2017

Photometric Diagrams

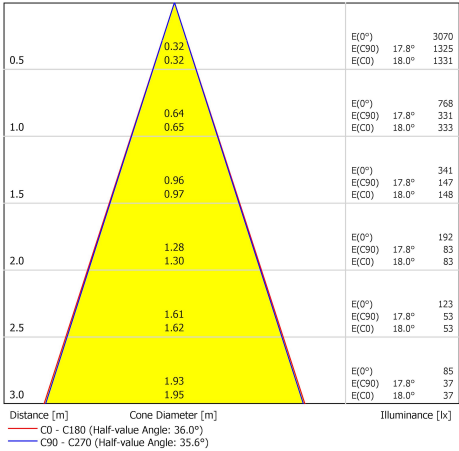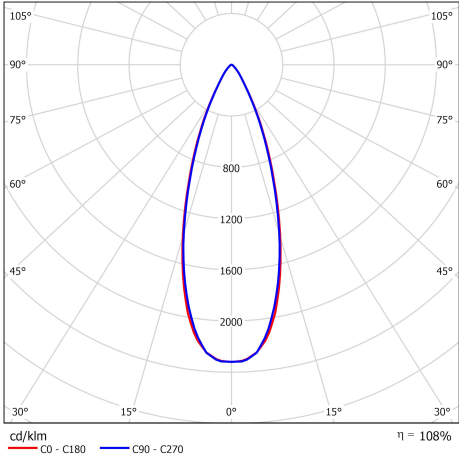

Energy Rating

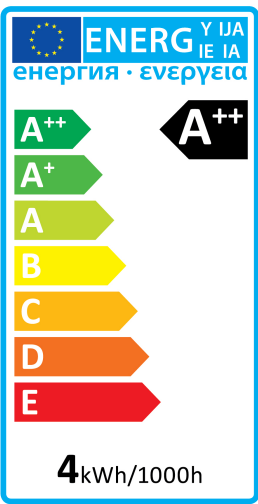

Technical Packaging Details

**Barcode**  
023942523246

**EAN 128**  
(02)00023942523246(37)10(91)814

**EAN 14**  
50023942523241

**Pack Dimensions(HxWxL)**  
H67 \*W51\*L51 (mm)

**Pack Weight**  
70 (g)

**MOQ**  
10

**Carton Dimensions (HxWxL)**  
H60\*W145\*L280 (mm)

**Cartons/Pallet**  
221

**Layers/Pallet**  
13

**Units/Pallet**  
2210

19/10/2017