


Commissioning

- Check all connections are tight. Plug in the 3 Pin LED driver and test.
- Secure the clips in place on the Aqualine strip with the supplied cable clips and screws. See Fig. 4 on right.
- Your strips are now ready for use.



Recycling advice

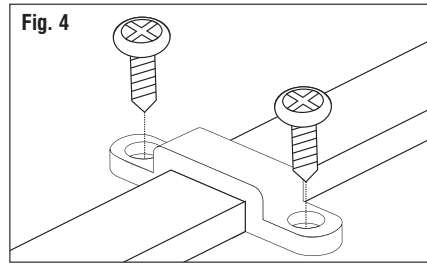

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

For your safety, always switch off the supply before changing lightbulbs, or cleaning.

Instruction leaflet

Aqualine Kit

73710, 73711



CE

saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

The power supply is Double Insulated and does not require connection to an Earth circuit.

The LED strips are Safety Extra Low Voltage and must not be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

This system operates at Safety Extra Low Voltage (12V), via a plug in LED driver. Never connect the light fittings directly to the mains without using the plug in LED driver.

Ensure that the supplied plug in LED driver is used.

The plug in driver has no special protection against the ingress of moisture and must be situated indoors (e.g. house, garage, shed) in order to protect it from the elements.

Do not exceed the plug in LED driver load. LED drivers may require a minimum load to operate.

Always disconnect the LED driver from the mains when installing or maintaining this system.

This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

This product cannot be dimmed.

This product, excluding the plug in driver, is rated at IP65.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Specification

LED	:	73710: 12W LED tape module - 3000K/1260lm
	:	73711: 12W LED tape module - 6000K/1260lm
Dimensions	:	10mm W, 4mm H x 5000mm L
Voltage	:	240V ~ 50Hz
LED Voltage	:	12V d.c.

Specification

This Kit contains:

- 1 x 3 Pin plug in LED driver
- 1 x 5000mm LED strip with 2m cable
- 20 x cable clips
- 40 x screws

Layout

- This is a self contained kit and cannot be extended.
- The Aqualine LEDs are mountable using supplied cable clips and screws.
- The Aqualine LEDs can be shortened to a minimum of 100mm or multiples of 100mm.
- Plan the desired layout of this fitting carefully, ensuring the cables will reach the distance between the LED driver and the Aqualine LED strip.
- Avoid locating any cables in positions that would cause a hazard. Position cables and Aqualine LEDs away from areas where they may be at risk from being cut, trapped or damaged.
- This product, excluding the plug in driver, is rated at IP65.

Basic Installation

- Position the plug in driver next to the indoor mains outlet socket that the system will connect to. Do not plug-in at this stage.
- After deciding the layout of the Aqualine strip, ensure that the cable can connect when in the desired position.
- It is possible for the Aqualine strip to be shortened. This can be done in multiples of 100mm. Look for the line on the strip with four copper pads with scissors symbol, as shown below in Fig. 1.
- Cut using a sharp pair of scissors. Do not cut anywhere else on the strip as this may cause the Aqualine strip to stop working.
- Seal the end with a small amount of silicone sealant to maintain IP rating.
- Connect the threaded cable connector to the plug in LED driver. Ensure that the polarity is correct as shown in Fig. 3.

