




MAXIMUM COMBUSTION TIME TEST OF DAMAFLAMME 5.5 LB LOG

Equipment and Operation

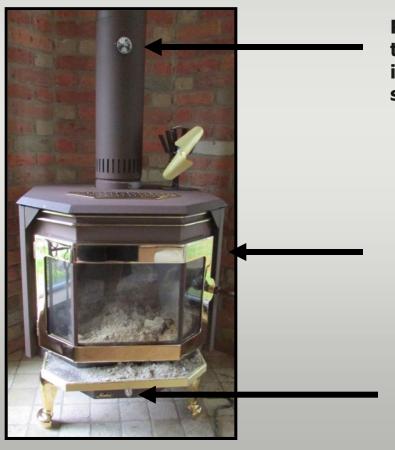

Reading of chimney thermometer installed 18 inches from the top of the stove

Slow combustion stove certified according to the new standards (NORDICA trademark)

Operation with stove pipe damper in closed position





First Step:

Creating a bed of embers from the log tested









Step two:

Placed 3 logs on the ember bed, closed stove's doors and pipe damper to a minimum









Monitoring combustion under the conditions described



0 h 8 h 45



1 h 9 h 45

2 h



10 h 15



10 h 40











Monitoring combustion under the conditions described

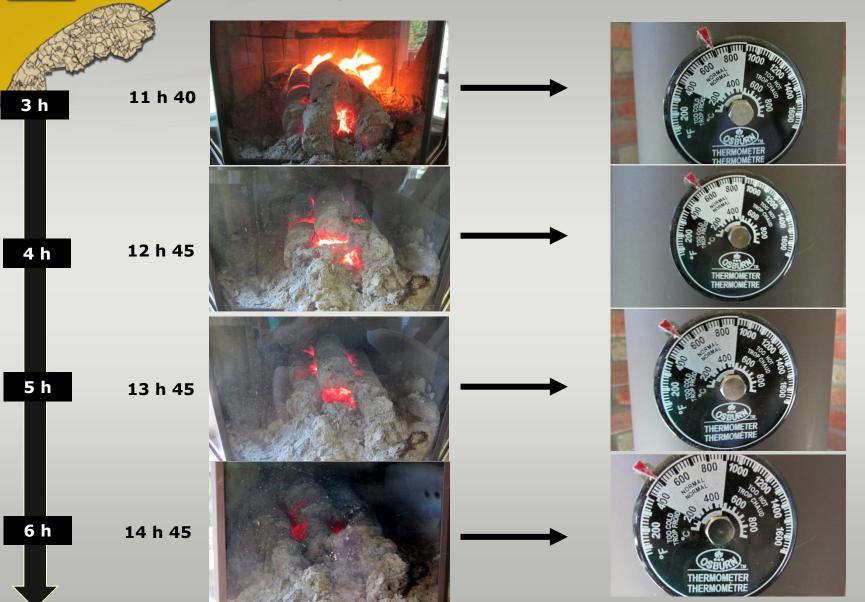

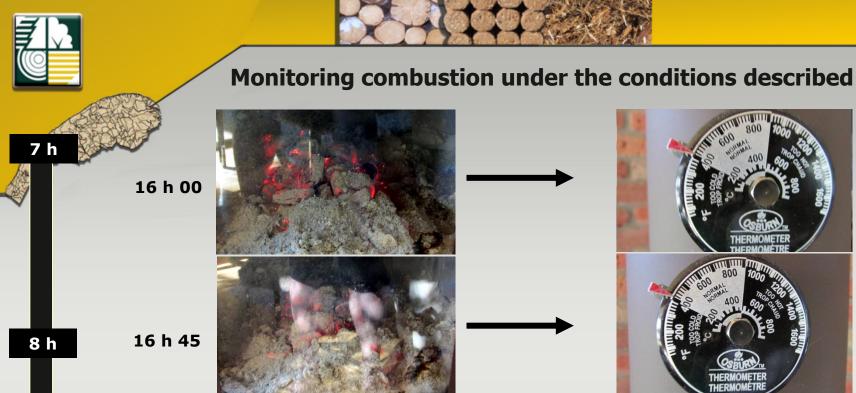



9 h

17 h 45

