

Verbatim LED Recessed Downlight INDIRECT 170mm 15W 3000K 1100lm 25° White

- Beautiful, indirect light
- Minimum glare (UGR<15.6) and high visual comfort
- 70,000 hours lifetime (L80B10)
- Light output of 1100lm
- 3000K warm white light
- 25° beam angle
- DALI option available
- Narrow binning of SDCM ≤3
- 5 Years Warranty




Product Number	52505
General Data	
Installation type	Recessed
Housing material	Aluminium & PBT
Housing colour	white - RAL9003
Protection class	IP40
Dimmable	Yes with optional DALI driver
Geometric Data	
Height (mm)	102
Outer diameter (mm)	170
Inner diameter (mm)	155
Weight (g)	695
Electric Data	
Wattage (W)	15
Voltage (V)	220-240
Current (mA)	68
Power Factor	0.9
Operating Frequency (Hz)	50/60
Safety Class	Class III
Power supply	External
Photometric Data	
Luminous Flux (lm)	1100
CRI	80
CCT (K)	3000
Luminous Efficacy (lm/W)	73
Luminous Intensity (cd)	3400
Beam Angle (°)	25
UGR	15.6
Lifespan	
Lifetime (hrs)	70,000 (L80B10)
Switching Cycle	100,000
Mechanical Parameters	
Glow wire test	850±°C


Product image



Technical drawing

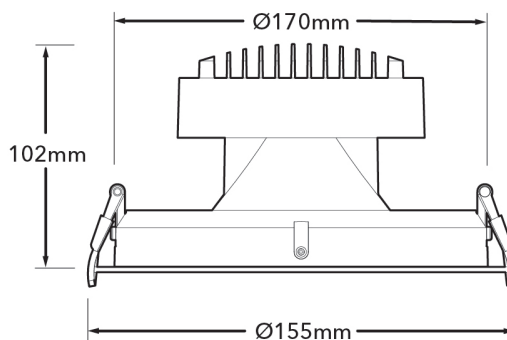

Energy Rating

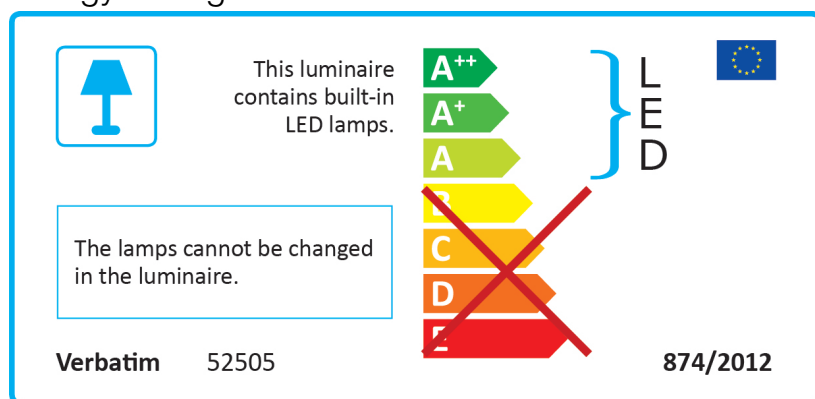

Technical Packaging Details

Barcode

023942525059

EAN 128

(02)00023942525066(37)01(91)469

EAN 14

50023942525061

Pack Dimensions(HxWxL)

205 x 205 x 135 (mm)

Pack Weight

855 (g)

MOQ

1

Cartons/Pallet

105

Layers/Pallet

7

Units/Pallet

105

