

# Verbatim LED Trumpet Downlight 220mm 20W/30W 4000K 2200lm/3300lm White

- Luminous efficacy of up to 110lm/W
- 50,000 hours lifetime (L85B10) / 70,000 hours lifetime (L80B10)
- Light output of 2200/3300lm
- 4000K neutral white light
- Flicker-free
- DALI option available
- UGR<19
- 5 Years Warranty




|                              |                               |
|------------------------------|-------------------------------|
| <b>Product Number</b>        | <b>52940</b>                  |
| <b>General Data</b>          |                               |
| Installation type            | Recessed                      |
| Housing material             | Aluminium & PBT               |
| Housing colour               | white - RAL9003               |
| Protection class             | IP40                          |
| Dimmable                     | Yes with optional DALI driver |
| <b>Geometric Data</b>        |                               |
| Height (mm)                  | 121                           |
| Outer diameter (mm)          | 220                           |
| Inner diameter (mm)          | 205                           |
| Weight (g)                   | 1040                          |
| <b>Electric Data</b>         |                               |
| Wattage (W)                  | 20/30                         |
| Voltage (V)                  | 220-240                       |
| Current (mA)                 | 950                           |
| Power Factor                 | 0.9                           |
| Operating Frequency (Hz)     | 50/60                         |
| Safety Class                 | Class III                     |
| Power supply                 | External                      |
| <b>Photometric Data</b>      |                               |
| Luminous Flux (lm)           | 2200/3300                     |
| CRI                          | 80                            |
| CCT (K)                      | 4000                          |
| Luminous Efficacy (lm/W)     | 110                           |
| Luminous Intensity (cd)      | 2200/3300                     |
| Beam Angle (°)               | 65                            |
| UGR                          | 17,2/18.6                     |
| <b>Lifespan</b>              |                               |
| Lifetime (hrs)               | 70,000                        |
| Switching Cycle              | 100,000                       |
| <b>Mechanical Parameters</b> |                               |
| Glow wire test               | 850°C                         |

## Product image




## Technical drawing

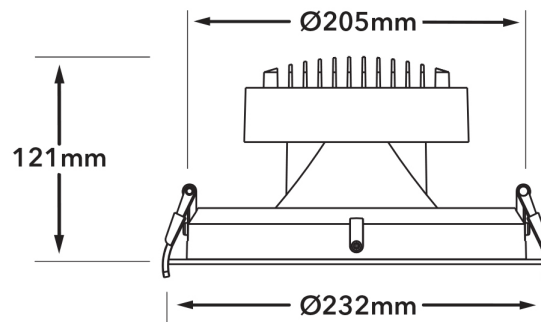

## Application image



## Energy Rating

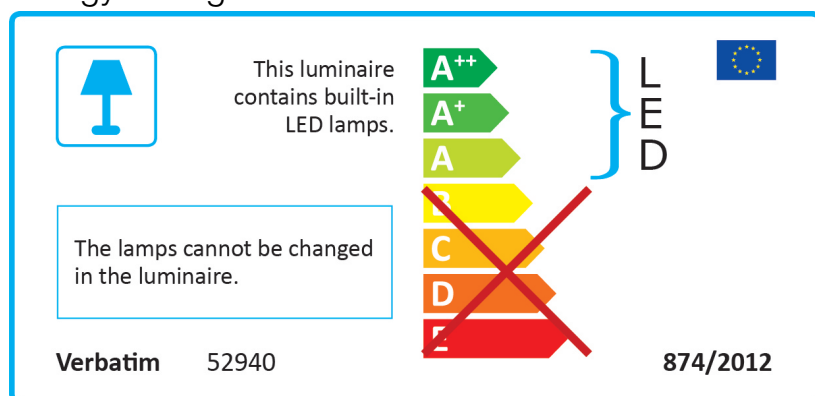

## Technical Packaging Details

**EAN 128**

(02)00023942529408(37)01(91)814

**EAN 14**

023942529408

**Pack Dimensions(HxWxL)**

250 x 250 x 155 (mm)

**MOQ**

1

**Carton Dimensions (HxWxL)**

1019 x 1140 x 760 (mm)

**Cartons/Pallet**

72

**Layers/Pallet**

6

**Units/Pallet**

72

