

MMFA81/MMFA66S GPS Location Trackers- Instructions for Setup and Use

Before you start it is important to know what these devices need so they can work properly.

1. An active Mobile phone network SIM card with a minimum of £1.00 credit (not compatible with 3 Network).
2. To establish a connection between your selected Network SIM card and the tracking device connection gateway (APN)
3. An Android or iOS Smartphone for installing and managing the tracking device Guardian/Carer APP.

Getting Started

A 1P Mobile SIM card may have been included with your device. If so, it will have £1.00 of usable credit to allow network coverage testing prior to paying for a Top-Up. **Please retain the welcome pack as it contains the information required for topping up and the SIM phone number.**

Ready? Unpack the items from the packaging.

MMFA66S Watch You should have: Tracker Device, Charging Cable, Small packet containing 2 screws (1 is a spare) Screwdriver, SIM card tray remover, manufacturer instruction booklet, Important information card – please read it. Charger plug, packed separately

MMFA81 You should have Tracker Device, Charging Cable, SIM tray remover, Lanyard, wrist strap and other attachments, Important notice – please read it, Charger plug, packed separately.

DO NOT ATTEMPT TO POWER ON THE DEVICE JUST YET!

Sequence of procedures

1. Install SIM card
2. Charge device
3. Download APP
4. Install APP and create user account
5. Pair/Bind your user account with APP gateway (from guardian Smartphone)
6. Power on device
7. Set APN (Note: 1P Mobile SIM is already set up to work with device)
8. Personalise the user preference settings in the APP

1. **Install SIM card.** The illustrations below show the correct positioning of the NANO SIM card in the SIM tray holder. Gently press out the smallest part of the SIM card then position it on the SIM tray with gold metal parts facing upwards. Gently slide the SIM tray into the slot making sure it is all the way in and the edge of SIM tray is flush with the device case. If you feel resistance when sliding the tray in, take it out and try again. Excessive force on an incorrectly positioned SIM tray may cause unreparable damage and may affect the product warranty. When the SIM tray is correctly fitted, use the included screwdriver and screw to secure and seal the SIM tray (MMFA66 only).



2. **Charge device. Only use the charger plug and lead included with your device.** Insert the USB plug of the charger lead into the USB socket of the included charger plug. Plug the charger into a mains outlet. The charge lead has a magnetic clip that will attach to the charging pins located on the bottom of the device. It will only click on in one way. Charge the device for 2-hours.

3. **Download the APP.** While the device is charging scan the appropriate QR Code for Android or iOS and download and install the APP.




Scan for iOS APP




Scan for Android APP

4.

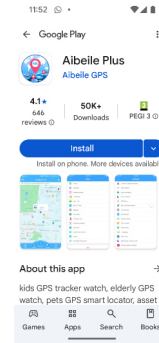


Tap Install

4. Create user account

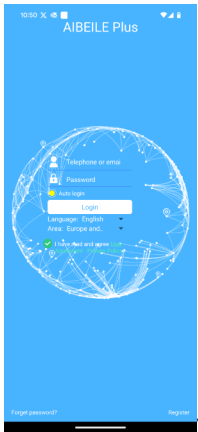

Tap Register first

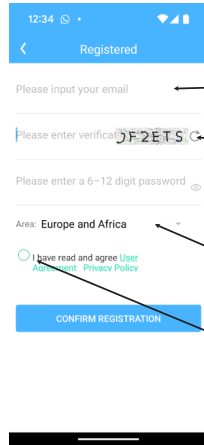

Enter the guardian email address

Type in the characters you see

Create password numbers and letters only

If required set Area to Europe


Tap to accept Terms of User Agreement

To complete, Tap CONFIRM REGISTRATION

5. Pair/Bind your APP with the Network Gateway.

After confirming registration you will see Start Binding. Tap Start Binding

Then see next screen.

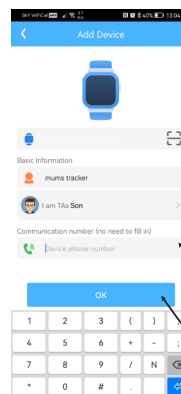

Tap this icon to scan the QR code label on the product packaging box.

Add a name for the tracker (letters only)


Add relationship to user, Son, Friend etc.

Add the phone number of the tracker SIM.

Click OK to complete

Important: You must keep the box in case the QR Code is needed

6. **Time to power up the device** - Press and hold the power button until you see the device coming on. Now go back to the phone APP and follow the remaining instructions.

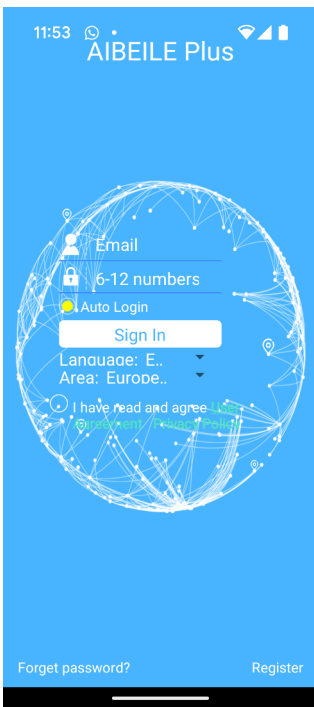

Setting device permissions in the APP

Open the app. Enter your email address, password, tap Auto Login (yellow dot visible)

Tap “I have read and agree the terms and conditions.

Tap sign in.

For the first time using the APP, when you sign in you will need to give permission for AIBEILE Plus to access:

Device Location

Access contacts

Make and manage phone calls

Access media (FA66 only, to view photos and videos taken by the watch)

Denying permissions will restrict or limit functionality of the device.

7. Setting APN for network gateway access by your device

Note, The 1P Mobile SIM is already configured for use the the MMFA81 and MMFA66S. No setting up is required.

If you prefer not to use the 1P Mobile network in favour of an alternative provider, or there is coverage from another provider, scan the QR Code to access a list of popular network APN instructions for how to update your device to a new provider.



When the APN setting is complete the Network Gateway will send a confirmation text to the guardian phone number.

8. Personalise the APP settings and completing setup

Create a contact on the guardian Smartphone for the tracker device phone number.

Open the AIBEILE APP and tap more on the bottom right hand side of the screen.

Select Setup

Select SOS/Family then enter up to 3 emergency contacts, then press save and check for settings applied message. Numbers dialled sequentially. If a call is saved to voicemail, dialling will stop. For all 3 contacts to receive an emergency notification go to SMS alerts and set SMS prompt to on. Note, in this mode there is no phone call only SMS.


Select Set the Time Zone and Language (only if the watch is showing an incorrect time and date) and select the Time Zone (for UK it is West 0.00) then set Summertime at the top to on.

Press OK to complete.

Ready to test location tracking


GPS Location (Satellite navigation) Before requesting location from the APP the watch will need to be outside with clear view of the sky for at least 2-minutes.

Open the APP. On the bottom of the screen tap “Locate”. The current location of the tracker should display. Observe the information box above the orange location marker. If the correct time and date is shown, this indicates real time tracking, if not, it is showing the last location time and date. More information on this is in the next section.

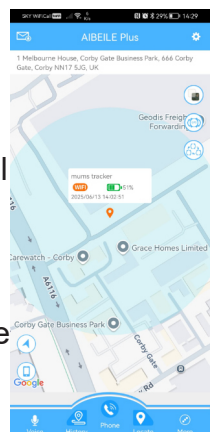


Getting to know more about the APP and various device settings

Open the APP then tap More to access the first settings menu

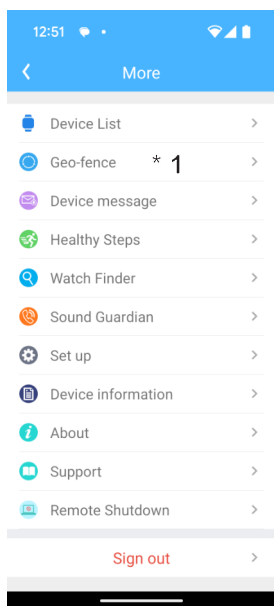

Device List	Add another device, view added devices, select device to monitor
Geo-fence * 1	Use to create a Geo-Fence (a zone that generates an alarm when exiting and entering)
Device message	Messages sent by the tracker device can be view here
Healthy Steps	View daily steps from the user (watch only)
Watch Finder	Use this to find the device if it misplaced (emits a beep if the device is on, charged, and online)
Sound Guardian	Can be used to monitor audio from the device (always respect privacy). Not for spying
Set up	Tap to access further device settings
Device information	Shows the device registration information with QR code
About	Shows the software version
Support	Provides access to a trouble shooting guide and further device setup information
Remote Shutdown	Use this feature to remotely switch off the device. Warning Manual restart required
Sign out	Exit the APP

Note. Depending on your device model, there may be additional features in the APP menu not covered by this manual. The main functions and features are included.

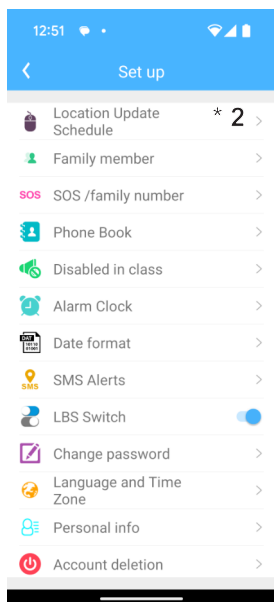

Location Update Schedule * 2	Select time frequency of location update to Gateway. See note on battery usage.
Family member	Shows account Administrator information
SOS /family number	This is where you enter up to 3 emergency contacts
Phone Book	This is where you create a safe list of contacts permitted to make calls to the device
Disabled in class	This is where you can restrict use of all functions except SOS calling between selected times
Alarm Clock	Use this to set up to 3 daily alarms
Date format	Select the format for date display
SMS Alerts	Options for device low battery. SOS prompt disables phone calling, all contacts receive SMS alert
LBS Switch	TURN LBS OFF to improve location accuracy with GPS and Wi-Fi location only
Change password	Change APP Login Password
Language and Time Zone	Select Language and time Zone. UK is Western 00.0 set to Summertime On
Personal info	Account administrator details
Account deletion	Delete and close account. Wise to complete this before uninstalling the APP.

- * 1 **Geo-Fence setup** Open Geo-Fence. Tap "+" at the bottom of the screen. Minimum Zone is 200M. Use the "+" and "-" tabs to increase/decrease zone, or use the dot scroll bar. You will see a shaded area around the target increase or decrease. When you have set the Zone size press save. Note: for best effect using Geo-Fence set update interval to 1 or 10 minutes otherwise breach alerts will be slow to arrive in the APP.
- * 2 **Location update** - affect on battery usage. Normal mode: 10 Mins moderate battery use. Power save: 1Hr minimum battery use. Follow - updates every minute excessive battery use (required for Geo-Fence mode). Sleep mode: Only locates by manual APP request. Lowest battery use. Typical daily usage for selected update interval: 1 Minute 1 - 2 days. 10 Minutes 3 - 5 days. 1 Hour 5 - 7 days. Sleep mode 7 - 10 days.

Phone calling, poor SIM signal, use of alarm functions, and no SIM credit are all factors that will affect the battery life.

Important! If using the 1P Mobile SIM you will need to register it within 24 hours otherwise your tracker will show "Device Offline". This is to prevent fraudulent or improper use of the 1P Mobile network.

In the event of difficulty setting up or using these devices, please contact your supplier where it was provided or purchased from.

The manufacturer and its distribution agents accept no liability or responsibility for loss of property, injury, or death however caused by use of these devices. They are not intended to replace human care, provide physical vital signs monitoring or diagnosis and are not supplied, intended, or considered a medical device.