



General Description

TUBU's High Output LED Linear Highbay/Lowbay fixtures combine classic form and versatility to make it an excellent choice for new construction or retrofit applications. The frosted polycarbonate lens optics allow for an even glow illumination. It can replace existing HID & HPS fixtures up to 500W. Powered by epistar SMD2835 LED, high lumen and high CRI. These lights offer a long lifetime and excellent lumen maintenance to minimise the maintenance costs.

Benefits

- Fast and easy installation to replace existing HID & HPS fixtures up to 500W
- A+++ 92% Energy saving compare to Halogen, 60% compare to Fluorescent, 60% compare to Metal Halide lighting
- Free maintenance cost, Dust free, Easy to clean because of the back special design, can be used for more applications

Features

- High Output LED's, up to 130lm/W, LM80 certified light source
- High CRI >80
- Meanwell brand driver, TUV UL CE certificate, PF>0.96, THD<12
- Flicker free
- Environmentally friendly, no mercury, No UV, No IR
- IP65, indoor, outdoor using
- Energy Efficiency Grade: A+++
- Quick Start instant 100% luminous flux
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE, RoHS, SAA, C-Tick, D-Certification, IP65 report


Applications

- Bus station
- Sports Halls
- Factories
- Warehouse
- Badminton court
- Exhibition Halls
- Airport
- Workshops
- Supermarket

Electrical and Technical Data

Model No	MG-HT080WE	MG-HT150WE	MG-HT200WE
Input Power	80W	150W	200W
Dimension	600mm	1200mm	1500mm
CCT	3000-6000K	3000-6000K	3000-6000K
CRI	>80	>80	>80
Power Factor	>0.9	>0.9	>0.9
IP Grade	IP65	IP65	IP65
Input Voltage	200-240VAC	200-240VAC	200-240VAC
Luminous	130lm/W	130lm/W	130lm/W
Beam Angle	120°	120°	120°
Working Temp	-30°-50°	-30°-50°	-30°-50°
Warranty	5 Years	5 Years	5 Years
Lifespan	50000H	50000H	50000H

Product Dimension&Package Details

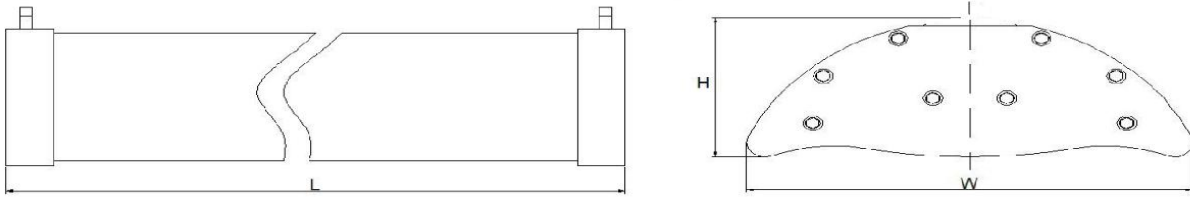

Model	L(Norm)	W(Norm)	H(Norm)	N.W/PC	G.W/PC	Qty/CTN	Size/CTN
MG-HT080WF	600mm	175mm	75mm	3.8KG	4.5KG	2PCS/CTN	650X230X235mm
MG-HT150WF	1200mm	175mm	75mm	7.0KG	7.8KG	2PCS/CTN	1250X230X235mm
MG-HT200WF	1500mm	175mm	75mm	8.2KG	8.7KG	2PCS/CTN	1550X230X235mm

Installation

