

Verbatim LED Downlight 12W 685lm 25° - White

- Energy saving alternative for MR16 or PAR16 Halogen downlights
- 25° beam angle
- Adjustable LED head: +/- 30°
- 30,000 hours lifetime
- Direct mains voltage connection (220-240V)
- Glare free light output of 685lm

Product Number 52404

General Data

Housing material	Aluminium
Housing colour	White
Protection class	IP20
Dimmable	yes

Geometric Data

Length (mm)	55
Outer diameter (mm)	112
Inner diameter (mm)	75
Weight (g)	360

Electric Data

Wattage (W)	12
Voltage (V)	220-240
Current (mA)	58
Power Factor	0.90
Operating Frequency (Hz)	50-60
Safety Class	Class II
Power supply	external

Photometric Data

Luminous Flux (lm)	720
Luminous Flux 90° Cone (lm)	685
CRI	80
CCT (K)	3000
Luminous Efficacy (lm/W)	60
Luminous Intensity (cd)	3150
Beam Angle (°)	25

Lifespan

Lifetime (hrs)	30,000
Switching Cycle	60,000

Mechanical Parameters

Glow wire test	650°
----------------	------




Product image



Application image



Energy Rating

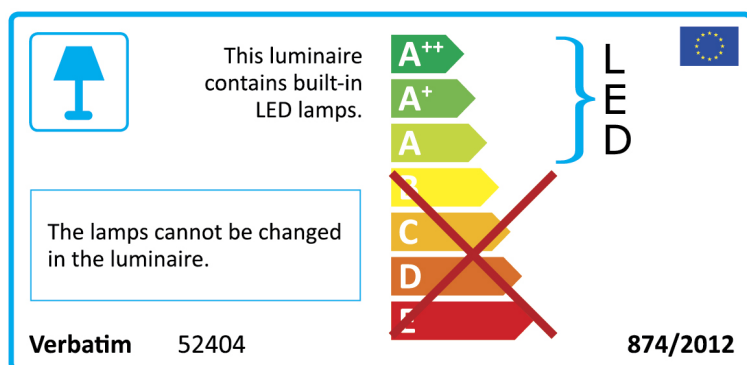

Technical Packaging Details

Barcode

023942524045

EAN 128

(02)00023942524045(37)04(91)162

EAN 14

50023942524040

Pack Dimensions(HxWxL)

73 x 120 x 168 (mm)

Pack Weight

450 (g)

MOQ

4

Carton Dimensions (HxWxL)

96 x 266 x 359 (mm)

Cartons/Pallet

80

Layers/Pallet

10

Units/Pallet

320



Photometric Diagrams

