

Adkins Labelling Solutions

for Nursing and Residential Care Homes

Rev A - 08/02/22



Desktop 'Label Master' Printer


Quick Start Guide

1 | Quick Start Guide What's in the Box?

What's in the Box?

Save the carton and all packing materials in case you need to ship or store the printer later. After unpacking, make sure you have all parts. Follow the procedures for inspecting the printer to familiarize yourself with printer parts so you can follow the instructions in this book.


Unpack and Inspect the Printer.




Quick Start Guide,
Printer User Guide,
Application Settings Guide,
Resource CD




Spare
Ribbon Core




Ink Ribbon
(already installed)

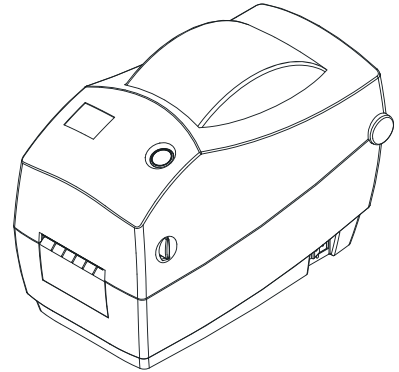


Printer

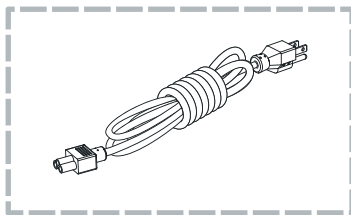

Power Cord
(varies by locale or region)



Power Supply



Label Roll


When you receive the printer, immediately unpack it and inspect for shipping damage.

- Save all packing materials.
- Check all exterior surfaces for damage.
- Open the printer and inspect the media compartment for damage to components.


If you discover shipping damage upon inspection:

- Immediately notify the shipping company and file a damage report. Adkins Labelling Solutions is not responsible for any damage incurred during shipment of the printer and will not cover the repair of this damage under its warranty policy.
 - Keep all packaging material for shipping company inspection.
 - Notify Adkins Labelling Solutions.
-


Preparing the printer

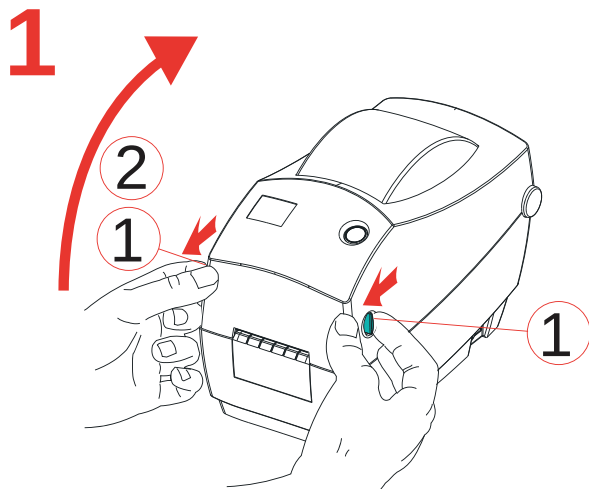


1. Press printer cover release catches to release printer cover
2. Raise printer cover until locked (notified by a single audible click)

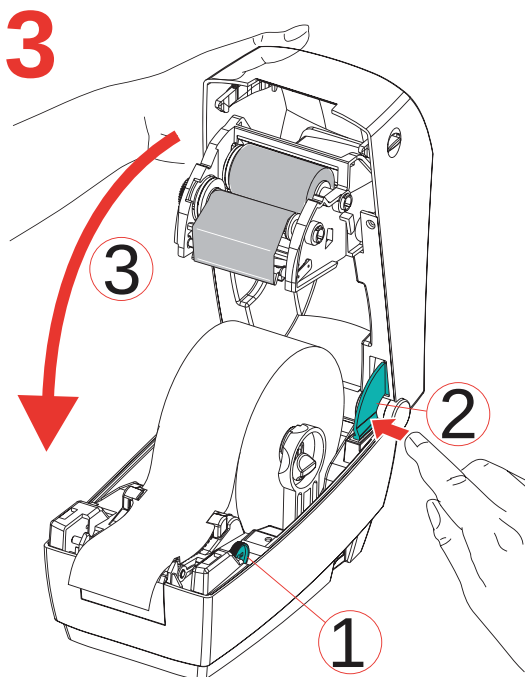


1. Feed label roll through guides (adjust if required)
2. Press locking hinge to release printer cover
3. Lower printer cover until locked (notified by a single audible click)

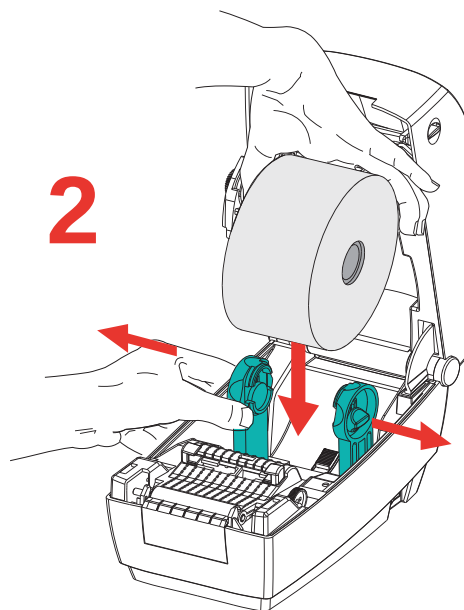

1. Load label roll

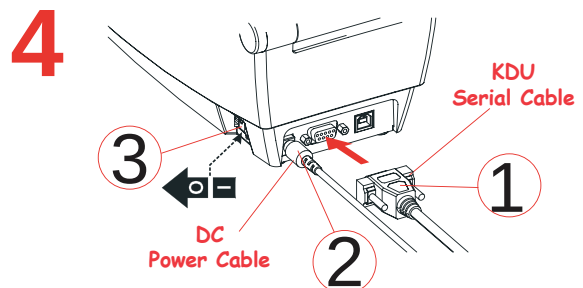

1. Insert KDU serial cable
2. Insert DC power cable
3. Switch on power (using rocker switch)
4. Wait for 20 seconds until printer status light is green and KDU starts (notified by a single audible beep)

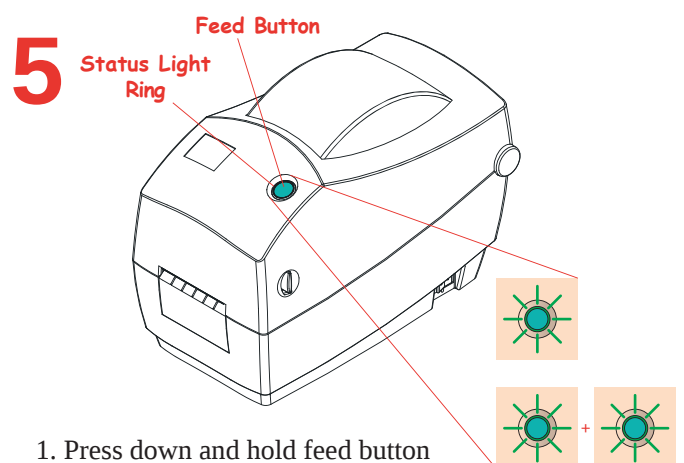


1. Press down and hold feed button
2. Wait until status light ring flashes twice
3. Release feed button
4. Printer will calibrate label roll and feed several labels
5. Rip off and discard blank labels
6. Printer is now ready for label production

Printing labels

The **Beta Swift Heat Press** is pre-set with a temperature of 200°C and a time of 12 sec. (A label is affixed to the front of the press with these settings)

N.B. If either of the above is not the case please refer to the **Heat Press** manual (supplied) for the correct procedure to reprogram the Controller

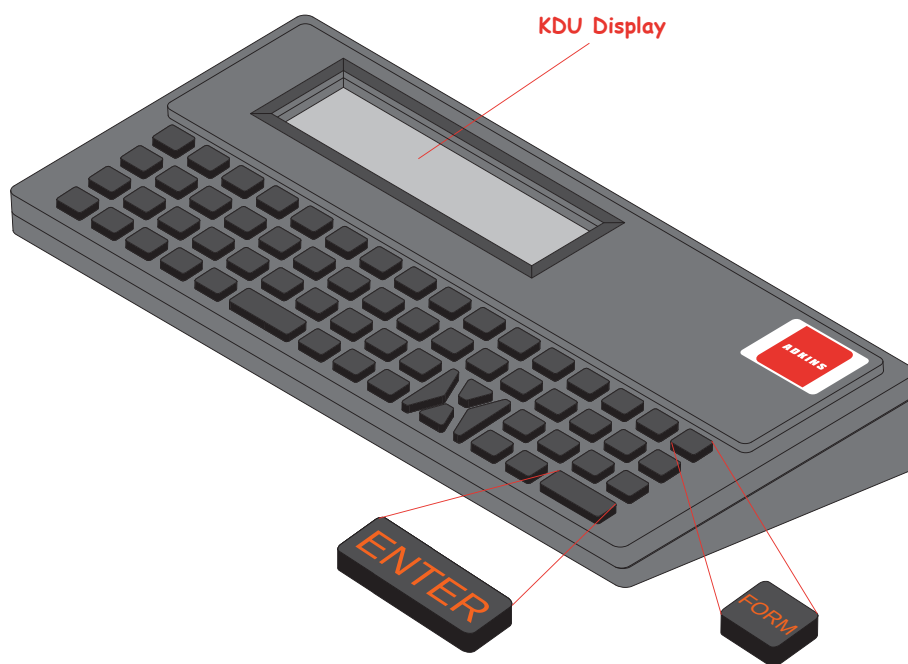

FOR A 'ONE LINE' NAME LABEL

Type: **FORM**

Display Reads: **Enter Form name:**

Type: **A D K I N S 1 + ENTER**

Display Reads: **NAME**

Type: *(name of resident)* + **ENTER**

Display Reads: **Number of Label Sets**

Type: *(No. of labels required e.g. 3)* + **ENTER**

FOR A 'TWO LINE' NAME LABEL

Type: **FORM**

Display Reads: **Enter Form name:**

Type: **A D K I N S 2 + ENTER**

Display Reads: **FIRST_NAME**

Type: *(first name of resident)* + **ENTER**

Display Reads: **LAST_NAME**

Type: *(last name of resident)* + **ENTER**

Display Reads: **Number of Label Sets**

Type: *(No. of labels required e.g. 3)* + **ENTER**

N.B.
THIS LABEL TYPE REQUIRES AN 'OPTIONAL'
LABEL ROLL THAT IS NOT SUPPLIED AS
STANDARD.

FOR A 'THREE LINE' NAME LABEL
WITH ADDITIONAL INFORMATION

Type: **FORM**

Display Reads: **Enter Form name:**

Type: **A D K I N S 3** + **ENTER**

Display Reads: **FIRST_NAME**

Type: *(first name of resident)* + **ENTER**

Display Reads: **LAST_NAME**

Type: *(last name of resident)* + **ENTER**

Display Reads: **INFORMATION**

Type: *(last name of resident)* + **ENTER**

Display Reads: **Number of Label Sets**

Type: *(No. of labels required e.g. 3)* + **ENTER**

HIGH CROSS - LANCASTER ROAD
HINCKLEY - LEICESTERSHIRE - LE10 0AW - UK
T +44 (0) 1455 891291 **F** +44 (0) 1455 633503
W www.aadkins.com

