

Verbatim LED Cardanic Spotlight 45W 3000K 4500lm 45D White

- Luminous efficacy of $\geq 100\text{lm/W}$
- 40.000 hours lifetime (L70)
- 3000K warm white light
- 45° beam angle
- Flexibility with 350° rotation 20° tilting angle
- Passing 850°C glow wire test
- Flicker free
- Driver included



Product Number 52276

General Data

Installation type	Recessed
Housing material	Aluminium
Housing colour	white (RAL9016)
Protection class	IP20
Dimmable	no

Geometric Data

Length (mm)	124
Outer diameter (mm)	180
Inner diameter (mm)	165
Weight (g)	1130

Electric Data

Wattage (W)	45
Voltage (V)	220-240
Current (mA)	195
Power Factor	0,95
Operating Frequency (Hz)	50-60
Safety Class	Class II
Power supply	External

Photometric Data

Luminous Flux (lm)	4500
CRI	80
CCT (K)	3000
Luminous Efficacy (lm/W)	100
Luminous Intensity (cd)	9500
Beam Angle (°)	45
Tilting Angle (°)	20

Lifespan

Lifetime (hrs)	40.000
Switching Cycle	100,000

Mechanical Parameters


Glow wire test	850°C
----------------	-------



Product image




Technical drawing

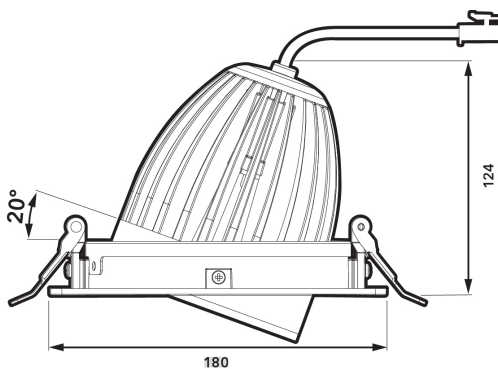

Application image



Energy Rating

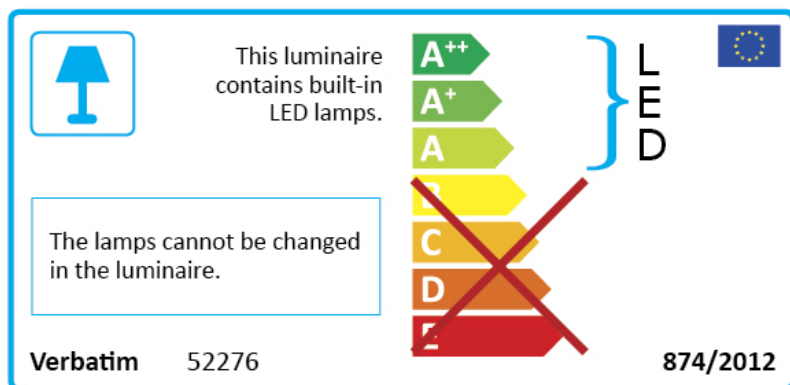

Technical Packaging Details

Barcode

023942522768

EAN 128

(02)00023942522768(37)01(91)147

EAN 14

50023942522763

Pack Dimensions(HxWxL)

20x20x15.5 cm (mm)

Pack Weight

1430g (g)

MOQ

1

Carton Dimensions (HxWxL)

20x20x15.5 cm (mm)

Cartons/Pallet

90

Layers/Pallet

6

Units/Pallet

90

