



AU-D4

Analogue to Digital Audio Converter



The AU-D4 is designed to convert analogue stereo audio to Digital Coaxial and Optical (Toslink) outputs simultaneously.

PANELS




Front View



Rear View

DIAGRAM

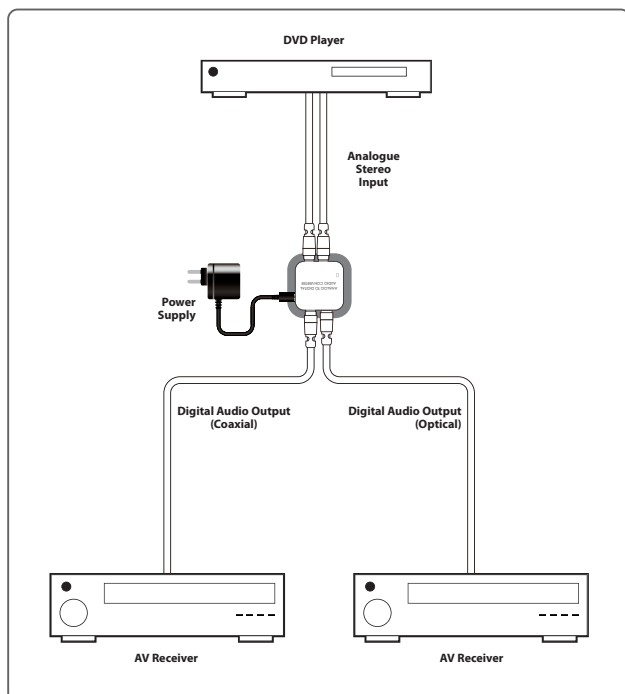

FEATURES

- Analogue to Digital Audio Converter (ADC)
- Uncompressed 2-channel LPCM digital audio signal output
- Compatible with cable lengths of 5m either side of the device
- Output sampling rate: 48kHz
- Electromagnetic noise-free transmission

SPECIFICATIONS

Interfaces

Input Port	1×Analogue Stereo (RCA connectors)
Output Port	1×Coaxial (Female) 1×Optical (TOSLINK connector)

Power

Power Supply	5V/1.2A DC (US/EU standards, CE/FCC/UL certified)
Power Consumption	0.6 W

Enclosure

Chassis Material	Plastic
Chassis Colour	Black
Dimensions (W×H×D)	57 mm × 23.5 mm × 45.5 mm
Weight	30g

ORDERING INFORMATION

Model No.	Product Description
-----------	---------------------

AU-D4	Analogue to Digital Audio Converter
-------	-------------------------------------