



THREE STEPS TO SHARING THE BUILT-IN STREAMERS IN A **TWO CONTROLLER SMZ16-PRE SYSTEM.**

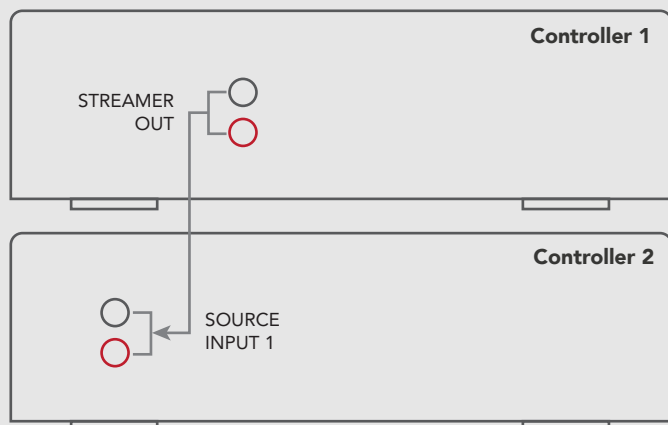


STEP
1

Controller 1's Internal Streamer is Source 1. Connect the "Streamer Out" from Controller 1 to Source Input 1 on Controller 2.

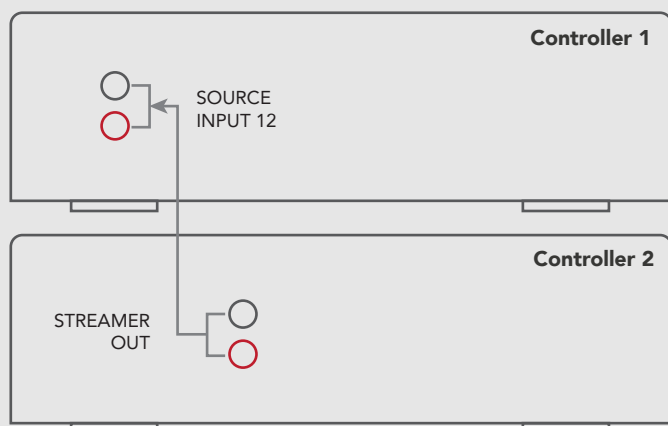

STEP
2

Controller 2's Internal Streamer is Source 12. Connect the "Streamer Out" from Controller 2 to Source Input 12 on Controller 1.

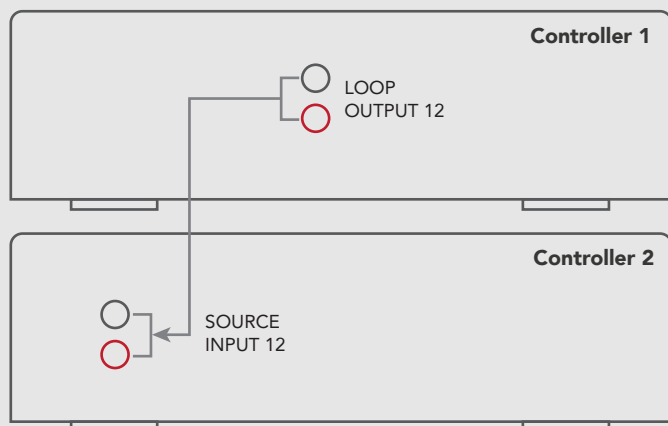

STEP
3

Connect Loop Output 12 from Controller 1 to Source Input 12 on Controller 2.

For additional controllers – Continue this process so that the built-in streamers of Controller 1 and Controller 2 cascade to the Source 1 and Source 12 inputs respectively on all other controllers