


# CORE TREE RING


## THE RANGE

### FLEXIBLE EDGE

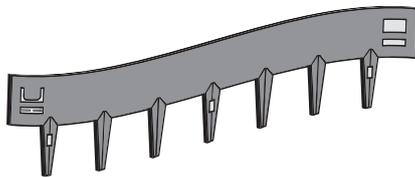


Perfect for deliniating lawns, flowerbeds, pathways & generally creating borders anywhere in your garden.

### ARTIFICIAL GRASS EDGE

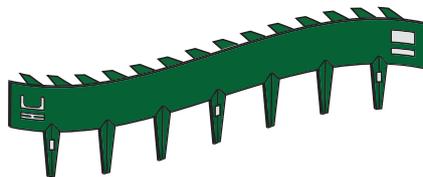

Specifically designed for use with artificial grass, the welded tabs provide the perfect fixing solution and also help to secure underlay.

### TREE RING

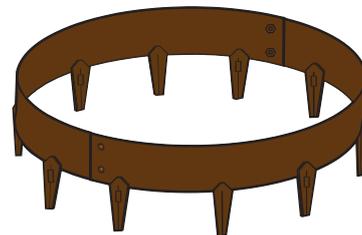


Our tree rings come pre-rolled meaning a perfect circle is easily achievable. We offer a 600mm or 900mm diameter ring.

## INSTALLATION




### STEP 1

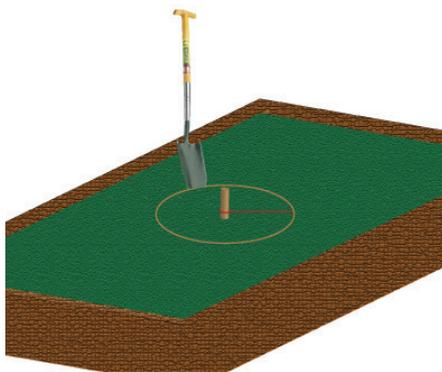


Firstly, mark out where you wish to put the Tree Ring according to the size you have ordered. For 600mm Tree Ring mark a 300mm radius, for a 900mm Tree Ring mark 450mm radius.

### STEP 2

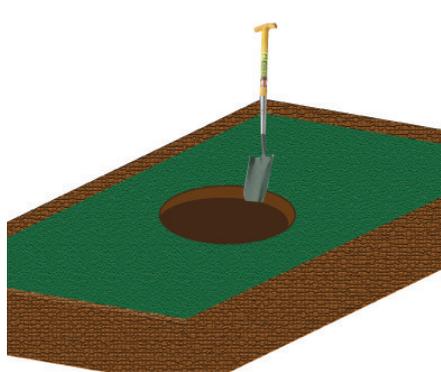


Using a garden spade cut around the edge of the marked area first and then remove the soil to the depth required according to the height of the Tree Ring.

### STEP 3

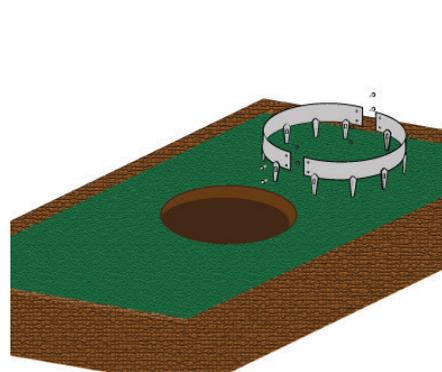


Position the edging sections on a flat even surface, this will be 2 sections for the 600mm and 3 sections for the 900mm. Using the bolts provided secure the edging sections together.

### STEP 4

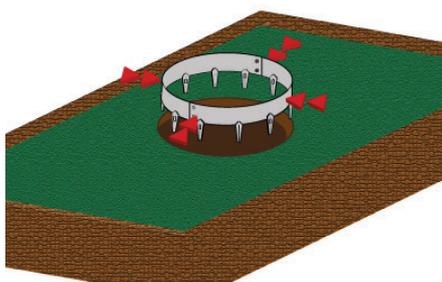

Position the ring over the top of the hole and insert the ring slowly, at this stage the Tree Ring will still be flexible which will allow you to adjust the ring to fit the exact shape of the hole.

### STEP 5

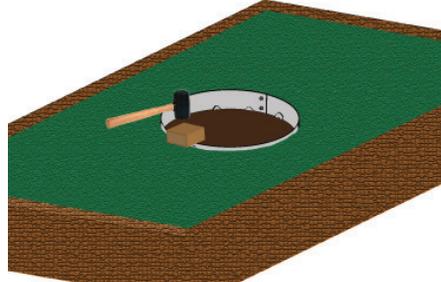

Using a mallet and block of wood tap the top of the edging to position the tree ring firmly into place.

### STEP 6



Ensure the top of the tree ring is flush with the surrounding soil to prevent any damage to the edging when mowing the surrounding area.