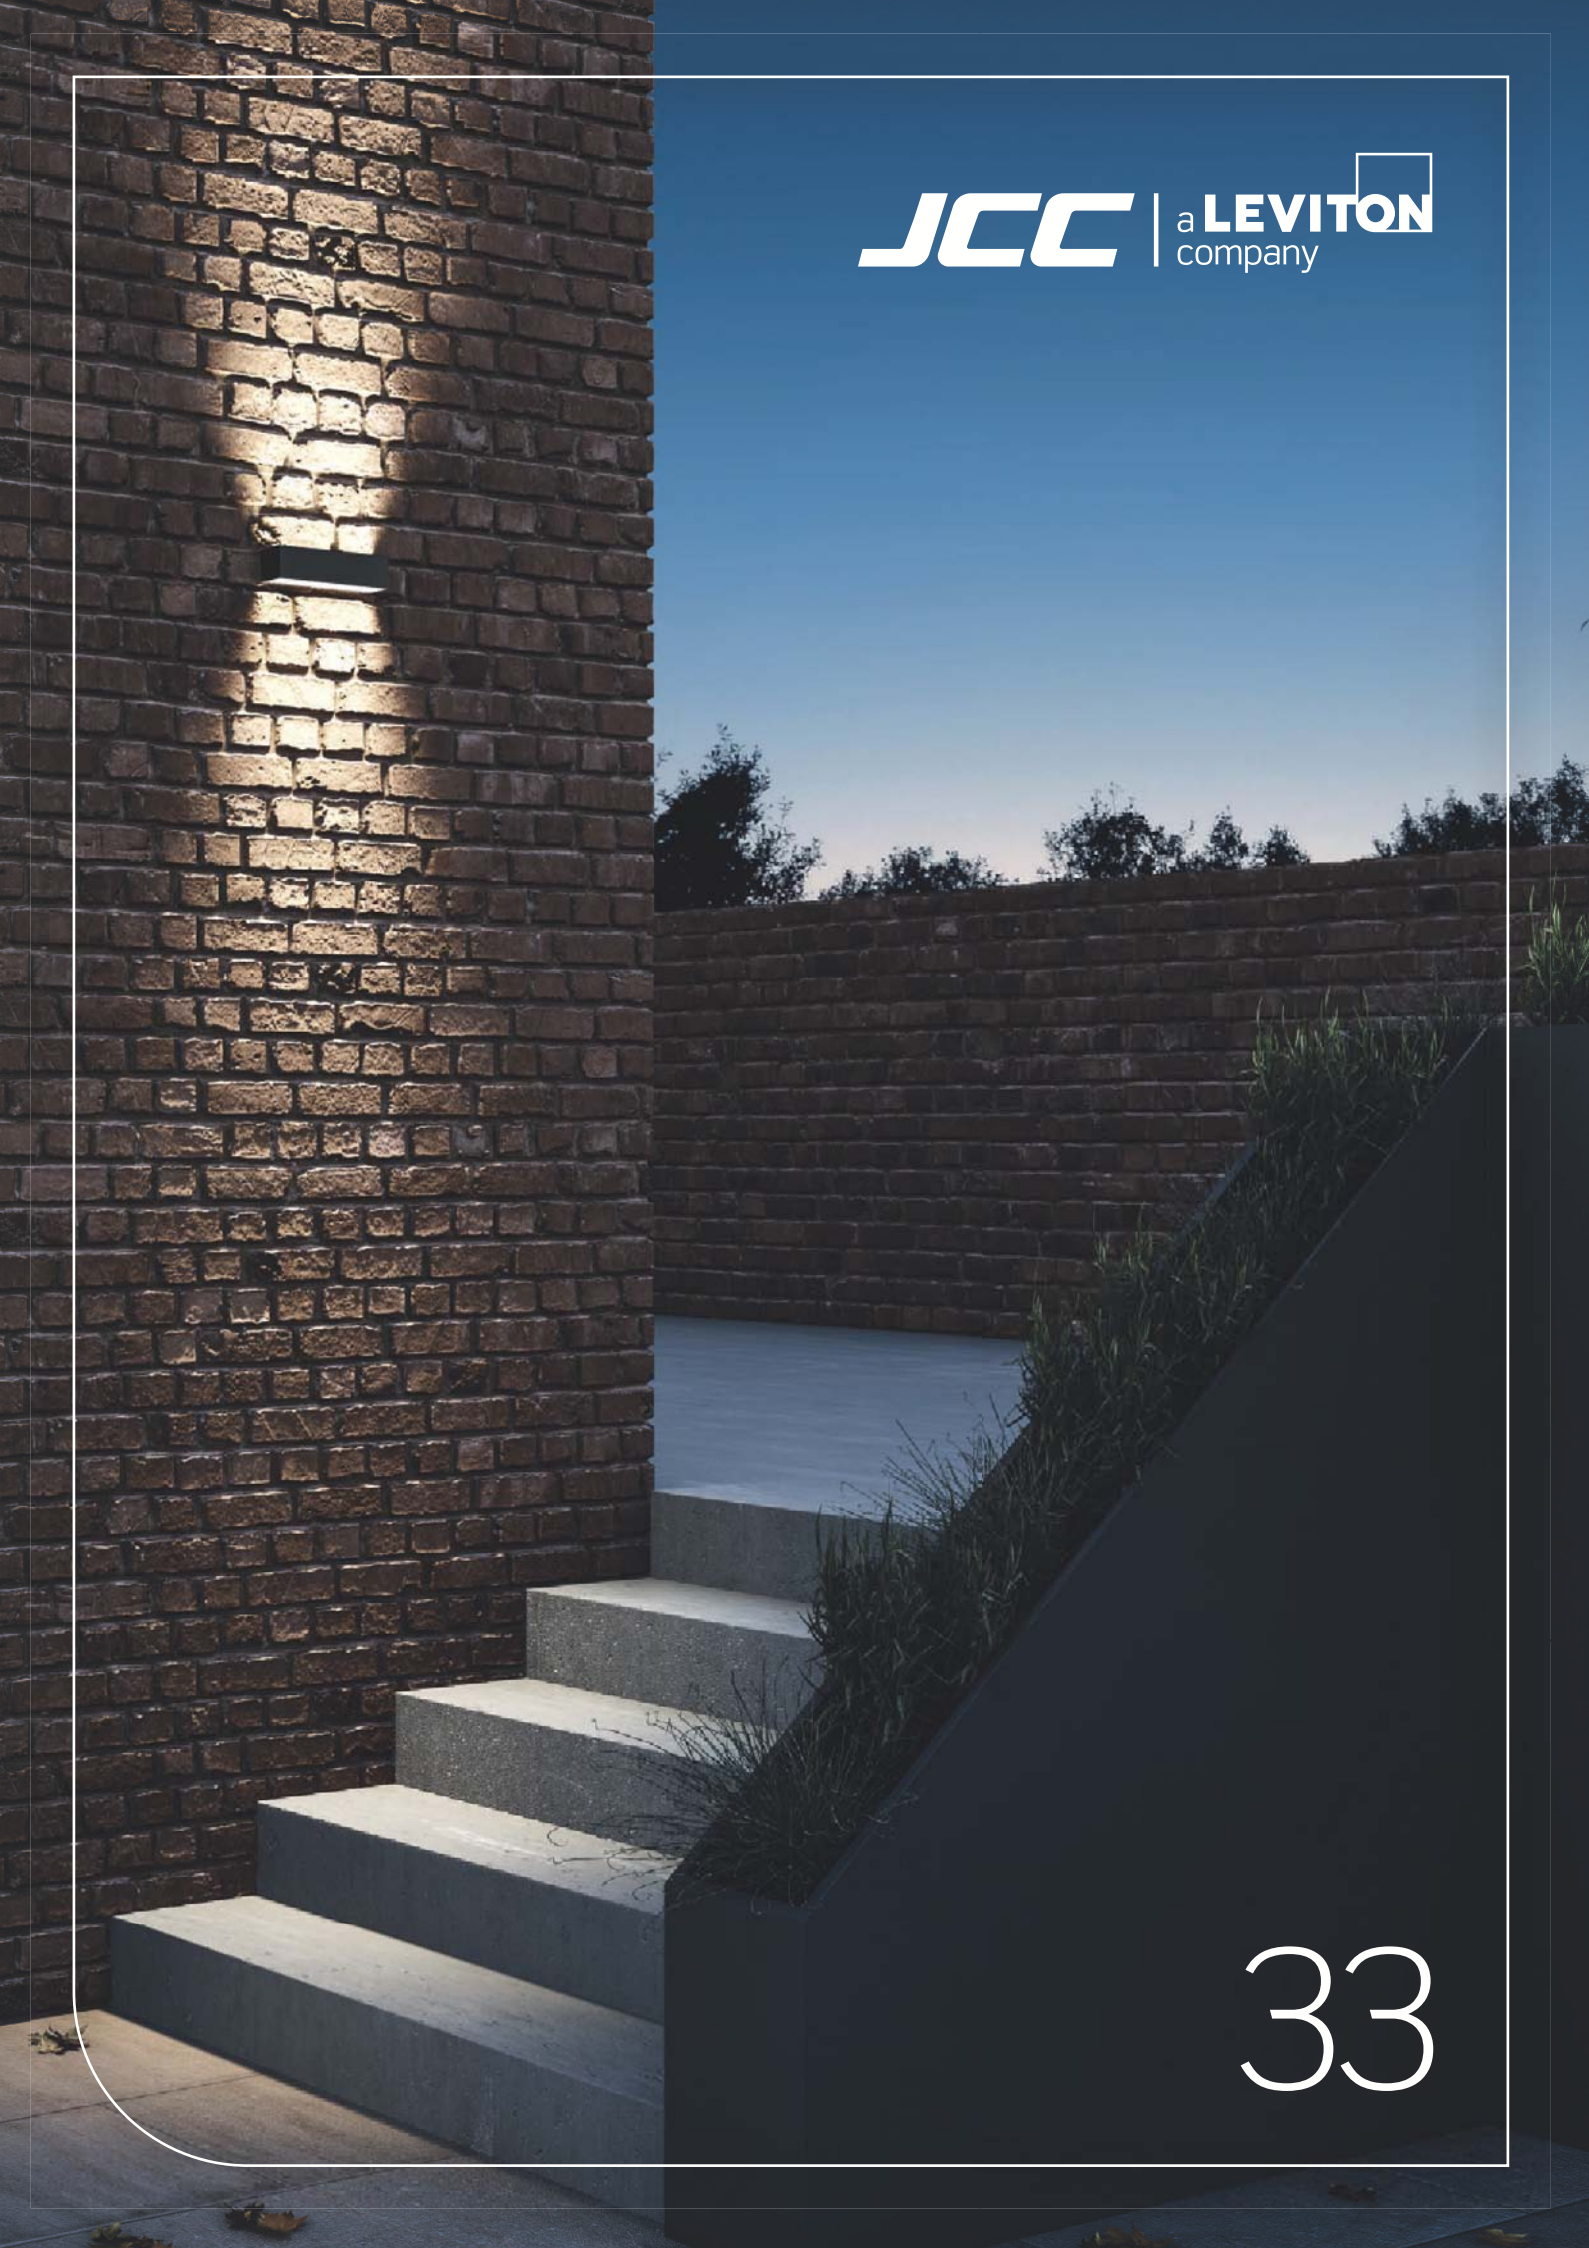
JCC
a LEVITON
company
33

Commercial Linear LED

Skytile® Surface 106

OxfordLED™ 116

Line of Light 118

Skytile® Surface

Unique slide and lock design for easy installation

EMERGENCY OPTIONS

MICROWAVE SENSING

DIMMABLE VARIANTS

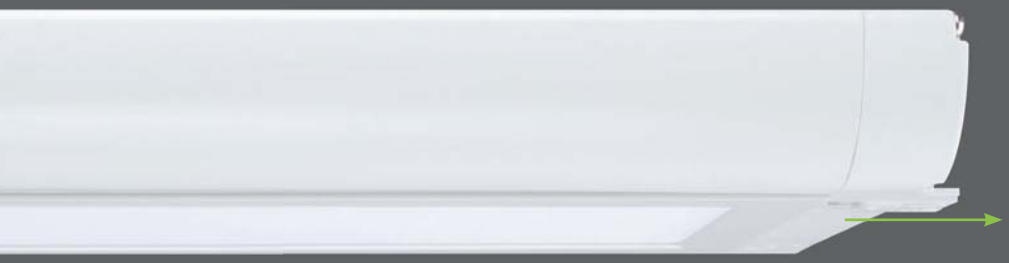

Secure Locking Caps

Skytile Surface has been designed to ensure a quick and easy installation. Slide the secure locking caps from both sides of the fitting to release the inner LED panel.

Hinged LED Panel

Once unlocked, the hinged pivot mechanism allows the panel to be carefully manoeuvred with ease for a faster, simpler installation.

4FT - 1200X300

Microwave*, DALI, DSI and 1-10V dimming variants available.

5FT - 1500X300

Microwave*, DALI, DSI and 1-10V dimming variants available.

6FT - 1800X300

Microwave*, DALI, DSI and 1-10V dimming variants available.

*Microwave versions 100mm longer than other variants

Skytile® Surface 4ft

Direct 2x36W T8 replacement

- Conduit entry points at both ends
- DALI, 1-10V and DSI dimmable options available
- Rear BESA plate mounting option



IP 20 RATING | CLASS 1 | 80 CRI: RA | 5yr WARRANTY* | 120° BEAM | EM OPTIONS | DIM OPTIONS | WH WHITE

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72305**	Skytile Surface	4000K	No	49W	4200	86
JC**72305EM**	Skytile Surface emergency	4000K	No	49W	4200	86
JC**72305DALI**	Skytile Surface DALI	4000K	Yes	49W	4200	86
JC**72305EMDALI**	Skytile Surface DALI emergency	4000K	Yes	49W	4200	86
JC**72305DSI**	Skytile Surface DSI	4000K	Yes	49W	4200	86
JC**72305EMDSI**	Skytile Surface DSI emergency	4000K	Yes	49W	4200	86
JC**72305/1-10V**	Skytile Surface 1-10V	4000K	Yes	49W	4200	86
JC**72305EM/1-10V**	Skytile Surface 1-10V emergency	4000K	Yes	49W	4200	86
JC**72301**	Skytile Surface	4700K	No	49W	4200	86
JC**72301EM**	Skytile Surface emergency	4700K	No	49W	4200	86
JC**72301DALI**	Skytile Surface DALI	4700K	Yes	49W	4200	86
JC**72301EMDALI**	Skytile Surface DALI emergency	4700K	Yes	49W	4200	86
JC**72301DSI**	Skytile Surface DSI	4700K	Yes	49W	4200	86
JC**72301EMDSI**	Skytile Surface DSI emergency	4700K	Yes	49W	4200	86
JC**72301/1-10V**	Skytile Surface 1-10V	4700K	Yes	49W	4200	86
JC**72301EM/1-10V**	Skytile Surface 1-10V emergency	4700K	Yes	49W	4200	86
JC**73301**	Skytile Surface	5700K	No	49W	4200	86
JC**73301EM**	Skytile Surface emergency	5700K	No	49W	4200	86
JC**73301DALI**	Skytile Surface DALI	5700K	Yes	49W	4200	86
JC**73301EMDALI**	Skytile Surface DALI emergency	5700K	Yes	49W	4200	86
JC**73301DSI**	Skytile Surface DSI	5700K	Yes	49W	4200	86
JC**73301EMDSI**	Skytile Surface DSI emergency	5700K	Yes	49W	4200	86
JC**73301/1-10V**	Skytile Surface 1-10V	5700K	Yes	49W	4200	86
JC**73301EM/1-10V**	Skytile Surface 1-10V emergency	5700K	Yes	49W	4200	86
JC**71311**	Skytile Surface suspension kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.

*Extended warranty requires online registration. 2 year warranty on batteries for emergency variants. Terms and conditions apply.

Skytile® Surface 4ft Microwave Sense

Direct 2x36W T8 replacement

- Conduit entry points available
- Rear BESA plate mounting option
- Microwave dimming with corridor function



IP 20 RATING | CLASS 1 | 80 CRI: RA | 5yr WARRANTY* | 120° BEAM | EM OPTIONS | SENSING | WH WHITE

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72305MW**	Skytile Surface microwave on/off	4000K	No	49W	4200	86
JC**72305EMMW**	Skytile Surface microwave on/off emergency	4000K	No	49W	4200	86
JC**72305SD**	Skytile Surface microwave step dim	4000K	-	49W	4200	86
JC**72305EMSD**	Skytile Surface microwave step dim emergency	4000K	-	49W	4200	86
JC**72301MW**	Skytile Surface microwave on/off	4700K	No	49W	4200	86
JC**72301EMMW**	Skytile Surface microwave on/off emergency	4700K	No	49W	4200	86
JC**72301SD**	Skytile Surface microwave step dim	4700K	-	49W	4200	86
JC**72301EMSD**	Skytile Surface microwave step dim emergency	4700K	-	49W	4200	86
JC**73301MW**	Skytile Surface microwave on/off	5700K	No	49W	4200	86
JC**73301EMMW**	Skytile Surface microwave on/off emergency	5700K	No	49W	4200	86
JC**73301SD**	Skytile Surface microwave step dim	5700K	-	49W	4200	86
JC**73301EMSD**	Skytile Surface microwave step dim emergency	5700K	-	49W	4200	86
JC**71311**	Skytile Surface suspension kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.

*Extended warranty requires online registration. 2 year warranty on batteries for emergency variants. Terms and conditions apply.

Skytile® Surface 5ft

Direct 2x58W T8 replacement

- Conduit entry points at both ends
- DALI, 1-10V and DSI dimmable options available
- Rear BESA plate mounting option



IP 20 RATING | CLASS 1 | 80 CRI: RA | 5yr WARRANTY* | 120° BEAM | EM OPTIONS | DIM OPTIONS | WH WHITE

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72306**	Skytile Surface	4000K	No	60W	5100	85
JC**72306EM**	Skytile Surface emergency	4000K	No	60W	5100	85
JC**72306DALI**	Skytile Surface DALI	4000K	Yes	60W	5100	85
JC**72306EMDALI**	Skytile Surface DALI emergency	4000K	Yes	60W	5100	85
JC**72306DSI**	Skytile Surface DSI	4000K	Yes	60W	5100	85
JC**72306EMDSI**	Skytile Surface DSI emergency	4000K	Yes	60W	5100	85
JC**72306/1-10V**	Skytile Surface 1-10V	4000K	Yes	60W	5100	85
JC**72306EM/1-10V**	Skytile Surface 1-10V emergency	4000K	Yes	60W	5100	85
JC**72302**	Skytile Surface	4700K	No	60W	5100	85
JC**72302EM**	Skytile Surface emergency	4700K	No	60W	5100	85
JC**72302DALI**	Skytile Surface DALI	4700K	Yes	60W	5100	85
JC**72302EMDALI**	Skytile Surface DALI emergency	4700K	Yes	60W	5100	85
JC**72302DSI**	Skytile Surface DSI	4700K	Yes	60W	5100	85
JC**72302EMDSI**	Skytile Surface DSI emergency	4700K	Yes	60W	5100	85
JC**72302/1-10V**	Skytile Surface 1-10V	4700K	Yes	60W	5100	85
JC**72302EM/1-10V**	Skytile Surface 1-10V emergency	4700K	Yes	60W	5100	85
JC**73302**	Skytile Surface	5700K	No	60W	5100	85
JC**73302EM**	Skytile Surface emergency	5700K	No	60W	5100	85
JC**73302DALI**	Skytile Surface DALI	5700K	Yes	60W	5100	85
JC**73302EMDALI**	Skytile Surface DALI emergency	5700K	Yes	60W	5100	85
JC**73302DSI**	Skytile Surface DSI	5700K	Yes	60W	5100	85
JC**73302EMDSI**	Skytile Surface DSI emergency	5700K	Yes	60W	5100	85
JC**73302/1-10V**	Skytile Surface 1-10V	5700K	Yes	60W	5100	85
JC**73302EM/1-10V**	Skytile Surface 1-10V emergency	5700K	Yes	60W	5100	85
JC**71311**	Skytile Surface suspension kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.

*Extended warranty requires online registration. 2 year warranty on batteries for emergency variants. Terms and conditions apply.

Skytile® Surface 5ft Microwave Sense

Direct 2x58W T8 replacement

- Conduit entry points available
- Rear BESA plate mounting option
- Microwave dimming with corridor function



IP 20 RATING | CLASS 1 | 80 CRI: RA | 5yr WARRANTY* | 120° BEAM | EM OPTIONS | SENSING | WH WHITE

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72306MW**	Skytile Surface microwave on/off	4000K	No	60W	5100	85
JC**72306EMMW**	Skytile Surface microwave on/off emergency	4000K	No	60W	5100	85
JC**72306SD**	Skytile Surface microwave step dim	4000K	-	60W	5100	85
JC**72306EMSD**	Skytile Surface microwave step dim emergency	4000K	-	60W	5100	85
JC**72302MW**	Skytile Surface microwave on/off	4700K	No	60W	5100	85
JC**72302EMMW**	Skytile Surface microwave on/off emergency	4700K	No	60W	5100	85
JC**72302SD**	Skytile Surface microwave step dim	4700K	-	60W	5100	85
JC**72302EMSD**	Skytile Surface microwave step dim emergency	4700K	-	60W	5100	85
JC**73302MW**	Skytile Surface microwave on/off	5700K	No	60W	5100	85
JC**73302EMMW**	Skytile Surface microwave on/off emergency	5700K	No	60W	5100	85
JC**73302SD**	Skytile Surface microwave step dim	5700K	-	60W	5100	85
JC**73302EMSD**	Skytile Surface microwave step dim emergency	5700K	-	60W	5100	85
JC**71311**	Skytile Surface suspension kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.

*Extended warranty requires online registration. 2 year warranty on batteries for emergency variants. Terms and conditions apply.

Skytile® Surface 5ft High Output

Direct 2x70W T8 replacement

- Conduit entry points at both ends
- DALI, 1-10V and DSI dimmable options available
- Rear BESA plate mounting option



IP 20 RATING | CLASS 1 | 80 CRI: RA | 5yr WARRANTY* | 120° BEAM | DIM OPTIONS | EM OPTIONS | WH WHITE

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72307**	Skytile Surface	4000K	No	80W	6400	80
JC**72307EM**	Skytile Surface emergency	4000K	No	80W	6400	80
JC**72307DALI**	Skytile Surface DALI	4000K	Yes	80W	6400	80
JC**72307EMDALI**	Skytile Surface DALI emergency	4000K	Yes	80W	6400	80
JC**72307DSI**	Skytile Surface DSI	4000K	Yes	80W	6400	80
JC**72307EMDSI**	Skytile Surface DSI emergency	4000K	Yes	80W	6400	80
JC**72307/1-10V**	Skytile Surface 1-10V	4000K	Yes	80W	6400	80
JC**72307EM/1-10V**	Skytile Surface 1-10V emergency	4000K	Yes	80W	6400	80
JC**72303**	Skytile Surface	4700K	No	80W	6400	80
JC**72303EM**	Skytile Surface emergency	4700K	No	80W	6400	80
JC**72303DALI**	Skytile Surface DALI	4700K	Yes	80W	6400	80
JC**72303EMDALI**	Skytile Surface DALI emergency	4700K	Yes	80W	6400	80
JC**72303DSI**	Skytile Surface DSI	4700K	Yes	80W	6400	80
JC**72303EMDSI**	Skytile Surface DSI emergency	4700K	Yes	80W	6400	80
JC**72303/1-10V**	Skytile Surface 1-10V	4700K	Yes	80W	6400	80
JC**72303EM/1-10V**	Skytile Surface 1-10V emergency	4700K	Yes	80W	6400	80
JC**73303**	Skytile Surface	5700K	No	80W	6400	80
JC**73303EM**	Skytile Surface emergency	5700K	No	80W	6400	80
JC**73303DALI**	Skytile Surface DALI	5700K	Yes	80W	6400	80
JC**73303EMDALI**	Skytile Surface DALI emergency	5700K	Yes	80W	6400	80
JC**73303DSI**	Skytile Surface DSI	5700K	Yes	80W	6400	80
JC**73303EMDSI**	Skytile Surface DSI emergency	5700K	Yes	80W	6400	80
JC**73303/1-10V**	Skytile Surface 1-10V	5700K	Yes	80W	6400	80
JC**73303EM/1-10V**	Skytile Surface 1-10V emergency	5700K	Yes	80W	6400	80
JC**71311**	Skytile Surface suspension kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.

*Extended warranty requires online registration. 2 year warranty on batteries for emergency variants. Terms and conditions apply.

Skytile® Surface 5ft High Output Microwave Sense

Direct 2x70W T8 replacement

- Conduit entry points available
- Rear BESA plate mounting option
- Microwave dimming with corridor function



RATING CLASS 1 CRI: RA WARRANTY* BEAM EM OPTIONS SENSING WHITE

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72307MW**	Skytile Surface microwave on/off	4000K	No	80W	6400	80
JC**72307EMMW**	Skytile Surface microwave on/off emergency	4000K	No	80W	6400	80
JC**72307SD**	Skytile Surface microwave step dim	4000K	-	80W	6400	80
JC**72307EMSD**	Skytile Surface microwave step dim emergency	4000K	-	80W	6400	80
JC**72303MW**	Skytile Surface microwave on/off	4700K	No	80W	6400	80
JC**72303EMMW**	Skytile Surface microwave on/off emergency	4700K	No	80W	6400	80
JC**72303SD**	Skytile Surface microwave step dim	4700K	-	80W	6400	80
JC**72303EMSD**	Skytile Surface microwave step dim emergency	4700K	-	80W	6400	80
JC**73303MW**	Skytile Surface microwave on/off	5700K	No	80W	6400	80
JC**73303EMMW**	Skytile Surface microwave on/off emergency	5700K	No	80W	6400	80
JC**73303SD**	Skytile Surface microwave step dim	5700K	-	80W	6400	80
JC**73303EMSD**	Skytile Surface microwave step dim emergency	5700K	-	80W	6400	80
JC**71311**	Skytile Surface suspension kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.

*Extended warranty requires online registration. 2 year warranty on batteries for emergency variants. Terms and conditions apply.

Skytile® Surface 6ft

Direct 2x80W T5 replacement

- Conduit entry points at both ends
- Rear BESA plate mounting option



IP 20 RATING | CLASS 1 | 80 CRI: RA | 5yr WARRANTY* | 120° BEAM | EM OPTIONS | DIM OPTIONS | WH WHITE

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72304**	Skytile Surface	4700K	No	100W	7300	73
JC**72304EM**	Skytile Surface emergency	4700K	No	100W	7300	73
JC**73304**	Skytile Surface	5700K	No	100W	7300	73
JC**73304EM**	Skytile Surface emergency	5700K	No	100W	7300	73
JC**71312**	Skytile Surface suspension kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.

*Extended warranty requires online registration. 2 year warranty on batteries for emergency variants. Terms and conditions apply.

Skytile® Surface 6ft Microwave Sense

Direct 2x80W T5 replacement

- Conduit entry points available
- Rear BESA plate mounting option
- Microwave dimming with corridor function



IP 20 RATING | CLASS 1 | 80 CRI: RA | 5yr WARRANTY* | 120° BEAM | EM OPTIONS | SENSING | WH WHITE

CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**72304MW**	Skytile Surface microwave on/off	4700K	No	100W	7300	73
JC**72304EMMW**	Skytile Surface microwave on/off emergency	4700K	No	100W	7300	73
JC**73304MW**	Skytile Surface microwave on/off	5700K	No	100W	7300	73
JC**73304EMMW**	Skytile Surface microwave on/off emergency	5700K	No	100W	7300	73
JC**71312**	Skytile Surface suspension kit (1.5m)	-	-	-	-	-

Body: Aluminium. **End caps:** Polycarbonate. **Diffuser:** Polystyrene.

*Extended warranty requires online registration. 2 year warranty on batteries for emergency variants. Terms and conditions apply.

OxfordLED™ 4ft

The 36W T8 fluorescent retrofit

- Hinged design for simple installation
- Emergency variants available
- DALI and 1-10V dimmable available



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**030001**	OxfordLED 4ft Single	4000K	No	20W	2700	135
JC**030011**	OxfordLED 4ft Single DALI/1-10V	4000K	Yes	20W	2700	135
JC**030002**	OxfordLED 4ft Single emergency	4000K	No	22W	2700	123
JC**030012**	OxfordLED 4ft Single DALI/1-10V emergency	4000K	Yes	22W	2700	123
JC**030003**	OxfordLED 4ft Twin	4000K	No	40W	4400	110
JC**030013**	OxfordLED 4ft Twin DALI/1-10V	4000K	Yes	40W	4400	110
JC**030004**	OxfordLED 4ft Twin emergency	4000K	No	42W	4400	105
JC**030014**	OxfordLED 4ft Twin DALI/1-10V emergency	4000K	Yes	42W	4400	105

Body: Steel. **Diffuser:** Polycarbonate.

*Extended warranty requires online registration. 2 year warranty on batteries for emergency variants. Terms and conditions apply.

OxfordLED™ 5ft

The 58W T8 fluorescent retrofit

- Hinged design for simple installation
- Emergency variants available
- DALI and 1-10V dimmable available

RATING CLASS 1 CRI: RA WARRANTY* EM OPTIONS DIM OPTIONS WHITE



CODE	DESCRIPTION	COL TEMP.	DIM.	WATT	LUMENS	LPCW
JC**030005**	OxfordLED 5ft Single	4000K	No	30W	3500	116
JC**030015**	OxfordLED 5ft Single DALI/1-10V	4000K	Yes	30W	3500	116
JC**030006**	OxfordLED 5ft Single emergency	4000K	No	32W	3500	109
JC**030016**	OxfordLED 5ft Single DALI/1-10V emergency	4000K	Yes	32W	3500	109
JC**030007**	OxfordLED 5ft Twin	4000K	No	60W	6400	107
JC**030017**	OxfordLED 5ft Twin DALI	4000K	Yes	60W	6400	107
JC**030027**	OxfordLED 5ft Twin 1-10V	4000K	Yes	60W	6400	107
JC**030008**	OxfordLED 5ft Twin emergency	4000K	No	62W	6400	103
JC**030018**	OxfordLED 5ft Twin DALI emergency	4000K	Yes	62W	6400	103
JC**030028**	OxfordLED 5ft Twin 1-10V emergency	4000K	Yes	62W	6400	103
JC**030009**	OxfordLED 5ft Twin High Output	4000K	No	80W	8400	105
JC**030019**	OxfordLED 5ft Twin High Output DALI	4000K	Yes	80W	8400	105
JC**030029**	OxfordLED 5ft Twin High Output 1-10V	4000K	Yes	80W	8400	105
JC**030010**	OxfordLED 5ft Twin High Output emergency	4000K	No	82W	8400	102
JC**030020**	OxfordLED 5ft Twin High Output DALI emergency	4000K	Yes	82W	8400	102
JC**030030**	OxfordLED 5ft Twin High Output 1-10V emergency	4000K	Yes	82W	8400	102

Body: Steel. **Diffuser:** Polycarbonate.

*Extended warranty requires online registration. 2 year warranty on batteries for emergency variants. Terms and conditions apply.

Line of Light

The optimum blend of form and function

PLUG AND PLAY INSTALLATION

INTEGRATED 3 HOUR EMERGENCY

SUSPENSION KIT AVAILABLE

With a polycarbonate diffuser and seamless aluminium profile, Line of Light creates a professional linear lighting solution suitable for any commercial project. The innovative plug and play connectors are integrated within each luminaire, allowing for a seamless lighting solution and ultra fast installation.

Line of Light Direct

Direct only light fittings

- Linkable plug and play lighting solution
- Available in white and black finish
- Integrated emergency versions available
- Suspension kit available

IP 20 RATING | CLASS 1 | 80 CRI: RA | 5yr WARRANTY* | EM OPTIONS | WH WHITE | BLK BLACK

84mm 1500mm

CODE	DESCRIPTION	COL TEMP.	WATT	LUMENS	LPCW
JC**773S/5/4K/ND/WH**	Line of Light Direct 1500mm start White	4000K	35W	3500	100
JC**773S/5/4K/ND/BLK**	Line of Light Direct 1500mm start Black	4000K	35W	3500	100
JC**773S/5/4K/NDEM/WH**	Line of Light Direct 1500mm start emergency White	4000K	35W	3500	100
JC**773S/5/4K/NDEM/BLK**	Line of Light Direct 1500mm start emergency Black	4000K	35W	3500	100
JC**773/5/4K/ND/WH**	Line of Light Direct 1500mm mid/end White	4000K	35W	3500	100
JC**773/5/4K/ND/BLK**	Line of Light Direct 1500mm mid/end Black	4000K	35W	3500	100
JC**773/5/4K/NDEM/WH**	Line of Light Direct 1500mm mid/end emergency White	4000K	35W	3500	100
JC**773/5/4K/NDEM/BLK**	Line of Light Direct 1500mm mid/end emergency Black	4000K	35W	3500	100
JC**770/1/SUS**	Line of Light suspension kit (pack of 2)	-	-	-	-

Body: Aluminium. **Diffuser:** Polycarbonate.

*Extended warranty requires online registration. Terms and conditions apply.