

MV-CE100-31GM

10 MP 1/2.3" CMOS GigE Area Scan Camera



GEN<i>i</i>CAM

GIG<i>E</i>
VISION


Introduction

MV-CE100-31GM camera is a high quality device that can be used in a variety of applications, including electronic semiconductor fabrication, factory automation, quality inspection.

Key Feature

- Adopts GigE interface and max. transmission distance of 100 meters without relay
- Up to 128 MB local memory for burst transmission and retransmission
- Supports auto exposure control, LUT, Gamma correction, etc.
- Supports hardware trigger, software trigger, etc.
- Compatible with GigE Vision V1.2 Protocol, GenICam Standard, and third-party software based on the protocol and standard

Dimension

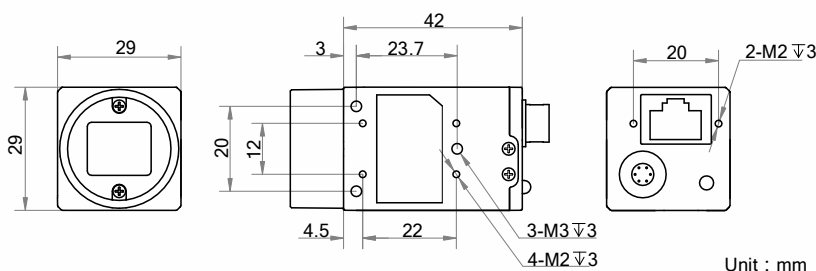


Available Model

Mono camera: MV-CE100-31GM

Applicable Industry

Electronic semiconductor, factory automation, quality inspection, etc.

Sensor Quantum Efficiency

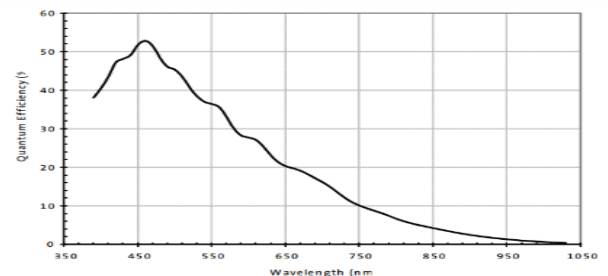

Specification

Model	MV-CE100-31GM
Camera	
Sensor type	CMOS, rolling shutter
Sensor model	MT9J003
Pixel size	1.67 μm \times 1.67 μm
Sensor size	1/2.3"
Resolution	3840 \times 2748
Max. frame rate	11 fps @3840 \times 2748
Dynamic range	65 dB
SNR	34 dB
Gain	0 dB to 15.3 dB
Exposure time	26 μs to 1 s
Shutter mode	Off/Once/Continuous exposure mode
Mono/color	Mono
Pixel format	Mono 8/10/10p/12/12p
Binning	Supports 2 \times 2
Decimation	Not support
Reverse image	Supports horizontal reverse image output
Image buffer	128 MB
Electrical features	
Data interface	Gigabit Ethernet
Digital I/O	Opto-isolated input x 1, opto-isolated output x 1, and bi-directional non-isolated I/O x 1
Power supply	5 VDC to 15 VDC, supports PoE power supply
Power consumption	Approx. 2.6 W@12 VDC
Structure	
Lens mount	C-Mount
Dimension	29 mm \times 29 mm \times 42 mm (1.1" \times 1.1" \times 1.7")
Weight	Approx. 68 g (0.15 lb.)
Ingress protection	IP30 (under proper lens installation and wiring)
Temperature	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$) Storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$)
Humidity	20% to 80% RH, without condensation
General	
Client software	MVS or third-party software meeting with GigE Vision Protocol
Operating system	32/64-bit Windows XP/7/10, 32/64-bit Linux and 64-bit MacOS
Compatibility	GigE Vision
Certification	CE, FCC, RoHS, KC



SCORPION
VISION LIMITED

www.scorpionvision.co.uk +44 (0)1590 679333
sales@scorpion.vision