

Pressure Regulators



Antelco Pressure Regulators are designed for low-flow micro irrigation systems. Pressure Regulators restrict the outlet pressure, optimising emitter performance.

Features

- Inlet pressure range: 0 - 700 kPa.
- Operating flow: 0.4 - 30 lpm.
- 2 outlet pressure options: 100 kPa or 175 kPa.
- 3/4" BSPF inlet x 3/4" BSPM outlet
- High strength, chemically resistant ABS construction for durability.

Applications

Drip, spray and sprinkler systems in landscape applications.

Ideally connected to taps, valves, tap timers and irrigation valves in a manifold system.


Pressure Regulator

TYPE	ORDER CODE	PACK QUANTITY	PACKS PER CARTON	CARTON (kg)
PRESSURE REGULATOR 3/4" BSPF x 3/4" BSPM 100 kPa	49505	10	42	14.5
PRESSURE REGULATOR 3/4" BSPF x 3/4" BSPM 175 kPa	49535	10	42	14.5




Pressure Regulator
100 kPa

Flow Rate: Pressure Regulator 100 kPa

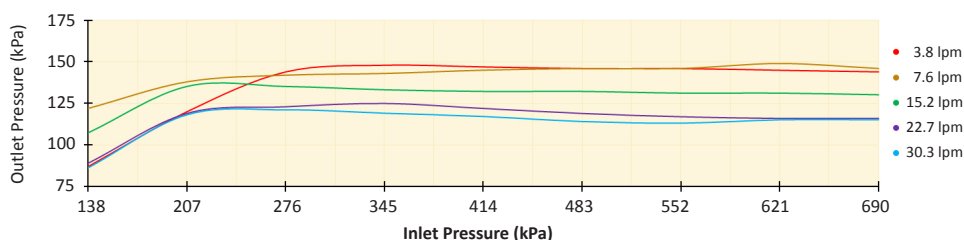

Pressure Regulator
175 kPa

Flow Rate: Pressure Regulator 175 kPa

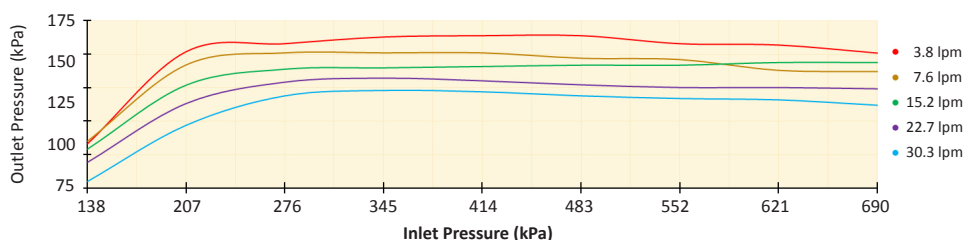

Specifications

DIMENSIONS		OPERATION	CONNECTION
HEIGHT	68 mm	OUTLETS PRESSURE 100 kPa & 175 kPa FLOW RANGE TOTAL 0.4 - 30 lpm	INLET BASE 3/4" BSPF
WIDTH	34 mm		OUTLET 3/4" BSPM
WEIGHT (approx)	31 g		

- The Pressure Regulators must always be installed downstream from all shut-off valves, regardless of the application.
- Regulators should be installed with vent hole unobstructed.
- Do not use sealing compound (solvent cement). If needed, teflon tape may be used to seal for leaks.

Putting water where it counts!®

ANTELCO UK LTD - EUROPE

Tel +44 152 585 9990

Fax +44 152 521 7985

Email buzz@antelco.co.uk

www.antelco.com

Scan the barcode with your iphone or smart phone and check out our website!

