

BD_SW_6BC_34 BMW 1000 RR , K46 2013-2018 race switch setLIN / GPS interface For clutch post or handlebar clamp mounting.

This 6 button switch is designed for use on race/track bikes where the road functions such as lights, turn signals and horn are not needed.

Wiring - No modification of the bike wiring is necessary, this kit plugs directly into the connectors of the standard loom via our LIN BUS interface which is programmed to be 100% compatible with the existing bike electronics, so no diagnostic warning lights


GPS – The standard switch provides a manual lap timer 'start' via the flash function, this is also re-created on our switch but we also provide an option to plug in a separate GPS lap timer which has large memory of built in track finish lines, as well as an easy to set 'record' button for creating new finish line positions.



Mount – This assembly mounts directly onto the clutch post to save space on the handlebar for brake adjusters and thumb brakes

Functions available

- Lap timing SET / Flash
- Slick +
- Slick -
- Trip – lap UP
- Trip – lap DOWN
- ABS

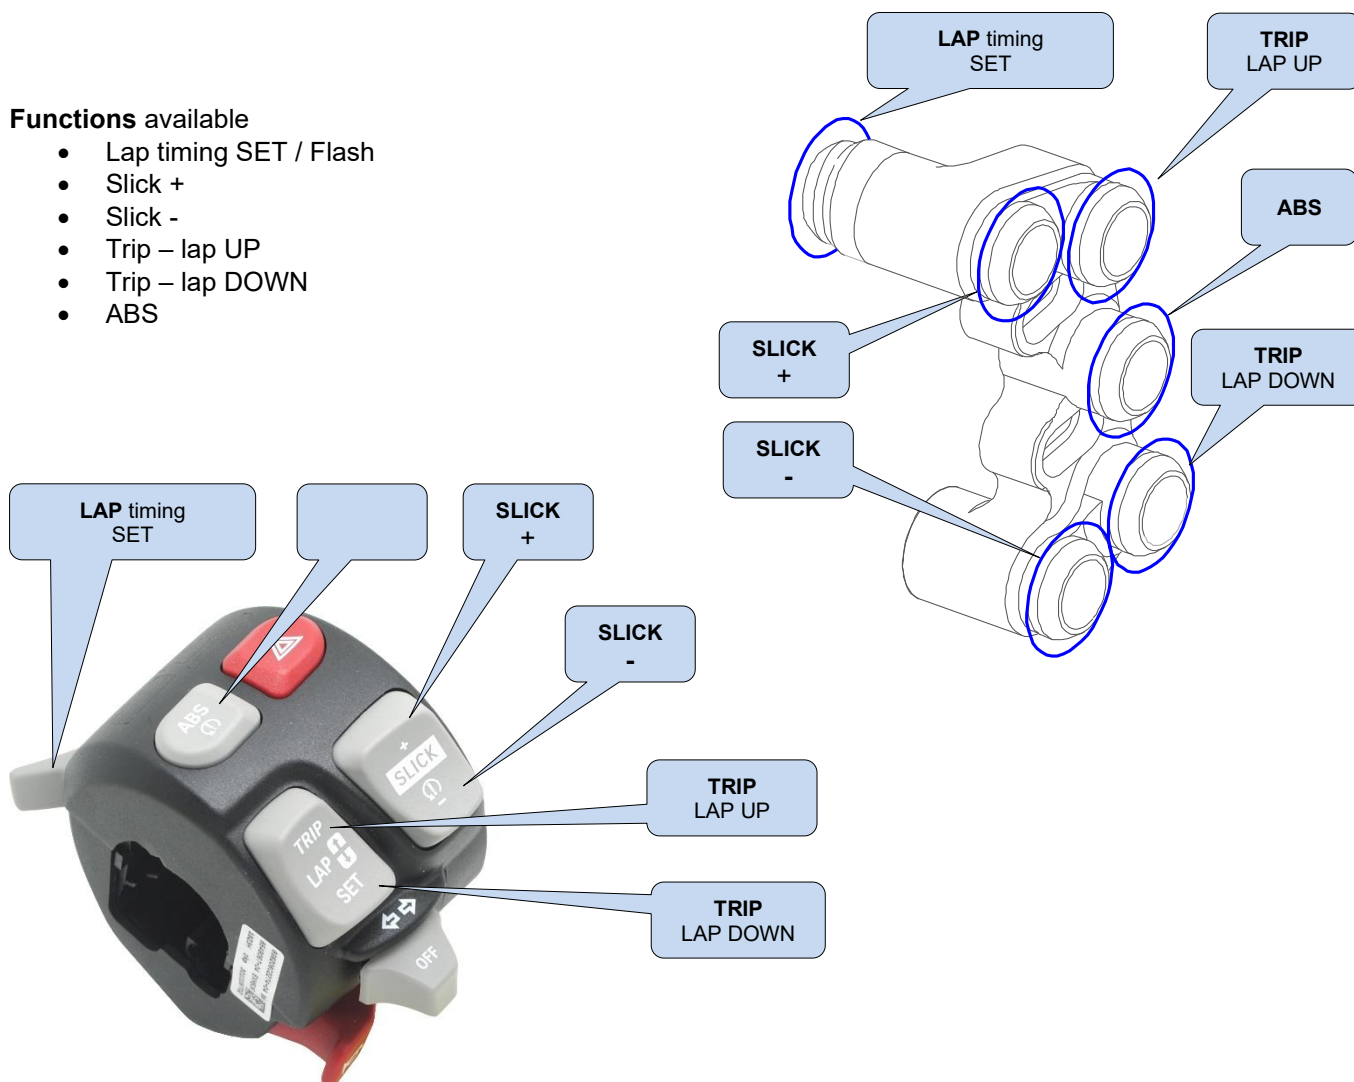

Electrical connection:


IMPORTANT : Always turn off the ignition and wait 2 minutes before disconnecting anything. This ensures the bike is fully turned off.

IMPORTANT : Always connect the switch assembly to the LIN module before turning on the bike ignition. The LIN module automatically recognises the type of switch fitted and transmits the correct information to the bike, without this you are likely to get a diagnostic error.

Your switch assembly is comprised of these components

- Switch assembly
- Switch mounting clamp of your choice
- Lin interface module KT146-B1
- GPS lap timer KT170 – Optional – See separate data sheet for use and setup information

Note: Heated grip wiring is not included.

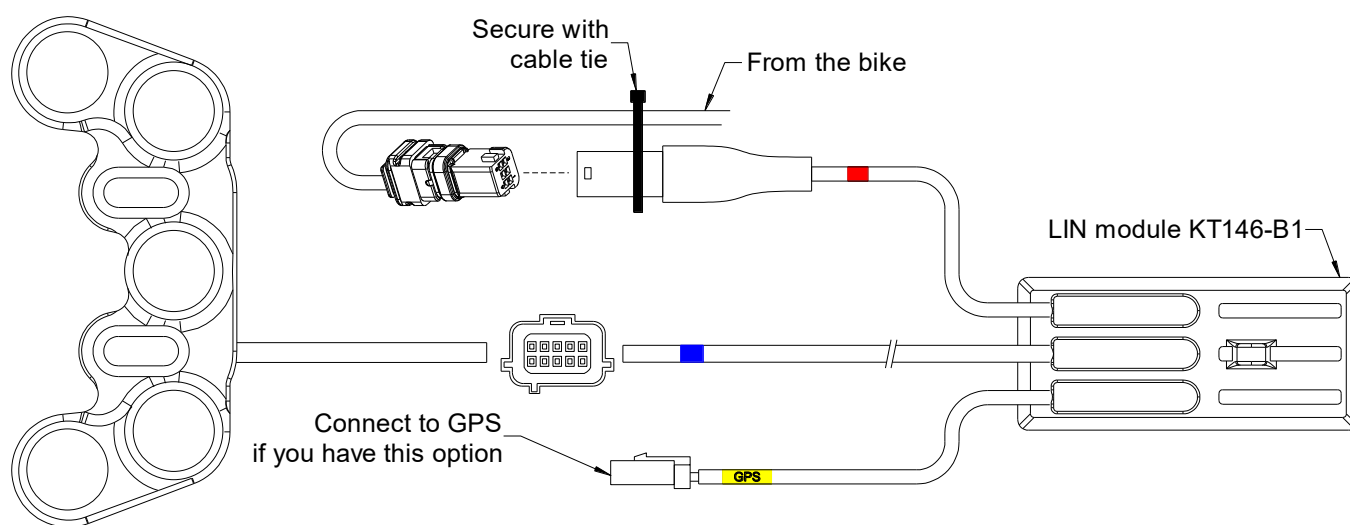

The LIN module may be fitted in any convenient location behind bodywork, but typically under the front fuel tank cover and to the left of the ignition switch. No special mounting is needed.

Compatible right switch for brake mounting

BD-SW-3BC_33

Stop/Run , Start , Mode

**Electrical / Mechanical Characteristics**

Wire..... Type 55 / 24

Switch sealing IP67

Housing.....Aluminium

CoatingBlack anodise

Dia (handlebar)22mm (7/8")

Wiring Plug n play

Ordering Information

Part No.	Description
BD-SW-6BC-34-xxx	6 button left handlebar switch – BMW K46 Complete kit, Switch, LIN interface, clutch clamp of your choice
	xxx - Choose appropriate clamp from the parts listed on page 3. One free clamp per switch assembly
KT170	GPS module – Automatic lap timer (GPS NOT included with the switch set, order separately)

Left side clutch clamps

Mounting - These 'Type C' switches can mount directly onto the clutch post using the two original clamp screws and a new dedicated clamp CL-A, but as a default choice we will supply the BR-G as this offers the most versatility.

Clamps

CL-A – To suit 32mm in-line clamp bolts

CL-K – To suit 36mm in-line bolts as found on Kawasaki

CL-B – To suit 30mm offset bolts – Brembo XR , XA , GP

CL-F – To suit 30mm in-line bolts as found on Accosato / Hel

CL-J – To suit 32mm offset bolts as found on Beringer

BR-G - Generic clamp for direct handlebar mounting.

These clamp designs use far less space on the handlebar than conventional switch bodies and are fully adjustable.








Mounting - These switches mount directly onto our own clutch post clamp and are adjustable left / right to suit the rider




0.5mm of gap – Used for tightening the clamp.
21.5 > 22.2mm dia bar

IMPORTANT CL-A, CL-B, CL-K
Tighten the UPPER bolt first to achieve metal to metal contact, then use the lower bolt to clamp onto the handlebar

Clamps are also sold separately so there is no need to replace the switch if you change your clutch post.

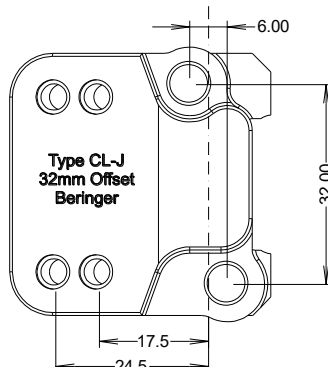

Type G
Generic clamp
Left or Right
Can be used with any
of our switch designs



LEFT 