

RESIN IMPREGNATED TAKRAGS

THE ORIGINAL TAKRAG (D3023) - MEDIUM TACK, TACKY CLOTH

The Original TAKrag is the industry standard wipe used within any area for the removal of dust contamination. Combining premium woven cotton with a medium tack resin, the Original TAKrag provides excellent dust collection and retention.

The specially formulated resin ensures that Gramos TAKrags will not dry out and is perfectly suited for the removal of dust contamination prior to finishing operations such as painting, lettering, powder coating etc.

Available in: 20 x 10 and 1 x 100 individually wrapped, 10 x 50 and 4 x 50 bulk pack, 1 x 50 dispense pack, 1 x 100m roll.

ULTRATAK (D3055) - NON-WOVEN, LIGHT/MEDIUM TACK

UltraTAK is made from an ultra soft, white, non-woven fabric which gives it a high snag resistant quality. Ideal for uneven surfaces and developed for use with water-based paint systems.

It is lightly impregnated with a unique resin system designed to provide optimum absorbency and contaminant retention. The unique fabric used in UltraTAK provides strong and tear resistant characteristics whilst also ensuring high dirt absorbency.

Available in: 1 x 100 individually wrapped, 1 x 1000 individually wrapped, 10 x 50 bulk pack, 1 x 50 supplied with dispenser.

SPECIALIST CLEANING WIPES

DG WIPES (D3084) - LOW V.O.C DEGREASING WIPES

DG Wipes are low lint, low VOC, aqueous degreasing wipes for all degreasing applications. Resealable packs, high quality fabric. Suitable for multiple surface finishing and degreasing applications, effectively removes oil, grease and grime.

High quality non-woven fabric provides optimum absorbency for an extremely low residue finish. The specially formulated low VOC aqueous impregnation provides a powerful cleaning action whilst greatly reducing the users VOC usage.

Available in: 10 x 25 bulk pack

AQUA WIPE (D3086F) - LINT FREE, ULTRA-LOW VOC, ANTI-STATIC DEGREASING WIPES

Aqua Wipe is a specially developed, non-linting cleaning wipe. This is based on high quality, strong tear resistant non-woven microfibre fabric which is impregnated with a tightly controlled quantity of specially formulated water based, biodegradable cleaning/degreasing fluid with anti-static agents.

Available in: 10 x 25 bulk pack

FLOOR MATS

SDA TAKMAT - SUPER DUST ABSORBANT

SDA TAKmats are an effective method of preventing foot borne contamination from entering or leaving protected zones.

SDA TAKmats are free standing, multi-layered, floor mats. Each layer is coated with a non-transferable resin and when placed at the entrance to sensitive areas they compel pedestrian traffic to step-on step-off the mat. The physical pressure of standing on the mat ensures that any loose particles on the soles of the shoes are detached and remain in the resin.

Available in: 61 x 91 (2 mats, D3305), 104 x 91cm (2 mats, D3304), 152 x 91cm (1 mat, D3303).



SOLVENT-BASED PEELABLE COATINGS

PROPEEL (G4602) - STANDARD

Propeel is a white, light-reflective, solvent-based, temporary coating designed for application to all smooth, clean metal spray booth walls. This provides an easy method of maintenance. Resistant to solvents once dry. The dried film collects paint over-spray and is readily peelable to enable even heavy over-spray deposits to be quickly and cleanly removed.

Propeel is easy to apply and will allow you to reduce the maintenance time in your spray booth.

Available in: 4 x 5L container, 25L drum.

PROPEEL HD (G4600) - HEAVY DUTY

Propeel HD is a heavy-duty, viscous liquid which dries to leave an off-white, tough, peelable film. It offers a simple, yet effective method of maintaining and protecting non-solvent-sensitive floors and other surfaces from abrasion, paints, oils, resins, and dilute acids and alkalis. Applied correctly this peelable protector will even withstand forklift trucks.

Keeps floors clean, making maintenance easy and offers good abrasion and chemical resistance.

Available in: 25L drum

WATER-BASED PEELABLE COATINGS

TACKY SURFACE COATING (A4512) - REMOVES AIRBORNE PARTICLES

Tacky Surface Coating is a water-based solution, specially formulated for application to painted spray booth walls. The film does not completely dry out at ambient temperatures and its tacky surface collects and holds dust - greatly assisting in keeping the spray booth area free from airborne particles which can be detrimental to the finished article. Once contaminated the coating can be easily washed off with water.

Available in: 4 x 5L containers, 25L drum.

AQUAPEEL (A4605) - STANDARD

Aquapeel is a white, water-based, temporary coating designed for application to smooth, clean metal walls in order to provide an easy method of maintenance. The dried film collects paint over-spray and contamination and is readily peelable to enable even heavy over-spray deposits to be quickly and cleanly removed.

Gramos Aquapeel provides a dry plastic temporary coating that will facilitate 'capture & containment' of even the heaviest paint overspray deposits that can then be quickly and easily removed by peeling off the coating for disposal during routine booth maintenance.

Available in: 4 x 5L containers, 25L drum.



TAKKILL ADDITIVES

TAKKILL BC1 (C8705) - BACTERICIDE ADDITIVE

TAKkill BC1 is a biocide specially developed for the complete microbiological protection of water based products, re-circulation systems and water based spray booth systems against bacterial and fungal spoilage in the wet state.

TAKkill BC1 is a wide spectrum biocide with proven activity against microorganisms which are commonly associated with aqueous industrial processes. This includes bacteria, mould and yeasts.

Available in: 5L containers, 25L drum.

TAKKILL AF (D8805) - ANTI-FOAM

TAKkill AF is a creamy emulsion blend of complex anti-foam agents in a highly refined mineral oil.

This silicone-free, highly efficient, foam-control agent is particularly suitable for use in the water of paint spray booths. It is especially effective in reducing foam created by over-spray of water-borne paints into the booth's water recirculation systems. It can also be used with solvent based paints being denatured in high pH alkaline water treatment solutions.

Available in: 20KG drum.

TAKKILL MA (A5629) - SPRAY BOOTH WATER TREATMENT ADDITIVE

TAKkill MA is a dispersion of antifoam in a mineral oil, used in a spray booth to aid the denaturing process. It has been designed as an additive to the water of spray booths, and is to be used as an addition to the spray booth denaturant to enable more effective paint denaturing to help control foam and bacterial activity.

TAKkill MA forms a film on the surface of the liquid in the water tank of the booth which prevents the particles of paint clogging and exposes the total surface area of the paint particle to attack by the paint denaturant.

Available in: 4 x 5L container, 25L drum.

TAKKILL ADDITIVE P.E.L. (D4702) - POLYELECTROLYTE RED

The TAKKill Additive P.E.L. flocculants and coagulating agents allow the solids to separate from the water and be removed in whatever means has been designed, (such as floatation and skimming systems or settlement tanks). This helps save time and money on disposal of waste. The TAKKill Additive P.E.L. is normally used in conjunction with other TAKKill denaturant products, which remove the tackiness of the resins prior to separation and removal.

Available in: 25L drum.


TAKKILL DENATURANT

TAKKILL FM DENATURANT (D4704) - LACQUERS

Neutral spray booth additive TAKkill FM Denaturant has been developed for the treatment of paint over-spray especially in pumpless spray booths. TAKkill FM Denaturant is neutral in reaction and is able to denature paints that are largely unaffected by alkaline additives.

TAKkill FM Denaturant is supplied as a viscous liquid and finds application in the wood finishing industry.

Available in: 4 x 5L container, 25L drum.

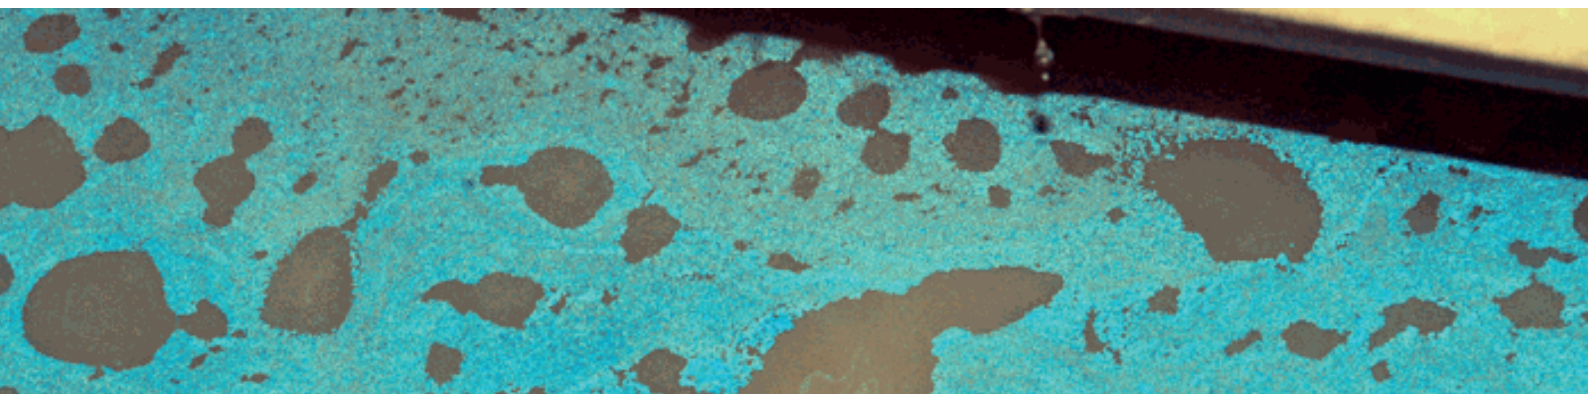

KLEENALL CLEANING RANGE

KLEENALL PASTE (D7030) - CLEANER WITH HYDRATED SILICA ABRASIVE

The original Kleenall Paste is lightly perfumed and free rinsing. Kleenall Paste is a pleasant and easy to use paste that has become a market leading product for the removal of paint, resins and adhesives.

The specialist formulation containing a hydrated silica abrasive, aids the removal of stubborn grease and grime, continuing to make Kleenall Paste the favourite hand cleaner amongst paint sprayers, print workers, mechanics and engineers.

Available in: 12 x 1L container, 4 x 5L tub and 25l bucket.

KLEENALL PROTECT (D7068) - MOISTURISER AND BARRIER CREAM

Kleenall Protect is a premium quality conditioning cream that moisturises the skin to prevent against cracking. Kleenall Protect is also a barrier cream, applied frequently it protects against dirt and enables easier cleaning which means that less aggressive hand cleaners are needed. Then, after work, Kleenall Protect is perfect to make your hands feel your own again.

Can be used for wet or dry work. 2-in-1 product, reduces the number of products required.

Available in: 12 x 500ml container, 2 x 5L tub.

KLEENALL LIQUID (D7067G) - CLEANER WITH HYDRATED SILICA ABRASIVE

Kleenall Liquid is a powerful liquid version of our renowned Kleenall Paste. Kleenall Liquid is an easily dispensed, hydrated silica hand cleaner that provides impeccable performance for professionals in the painting, printing and engineering areas.

Available in: 4 x 5l tub, including dispenser.

ESSENTIAL EXTRAS

BARRIER CURTAINS (D3080) - HIGH TACK, DUST CONTROL CURTAIN

Our Barrier Curtain is designed using premium woven cotton, with a high tack resin. This is essential for air filtering material within critical areas, as it allows it to contain airborne contamination.

The Gramos Barrier Curtain is an air filtering curtain manufactured from an open woven material impregnated with non-drying, flame retarding, tacky resin to trap and hold dust, lint and other fibrous airborne particles.

Available in: 86cm x 50m.

COVERALLS (S9250) - TYPE 5/6, NON-LINTING FABRIC

Disposable Coverall 55GSM microporous laminated non-linting fabric. This suit has an elasticated back, hood, cuffs & ankles, and an adhesive cover flap for additional sealing. Ideal for use in wide-ranging applications where the operating environment must not be contaminated with garment fibres.

Available in: packs of 25 (M/L/XL).

