




RoBox InsulatedXL

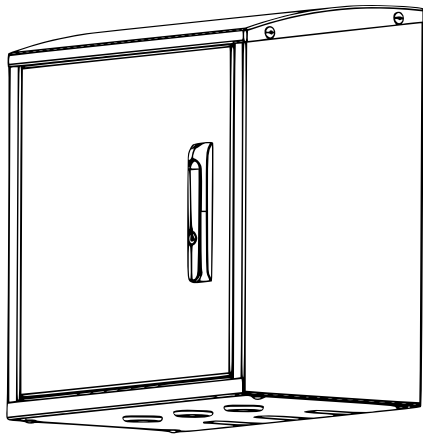


RBXL-105

Robox Insulated XL Tap Box Enclosure

Installation Instructions and User Guide

PLEASE NOTE: This insulated tap box will reduce the risk of your tap freezing in cold conditions, but it can't eliminate it completely. For maximum protection use insulation on the surface of the tap body. If extreme conditions persist you should isolate the tap from the water supply and drain out any residual water.




Robox Design Ltd
www.roboxdesign.co.uk
Tel: 0330 133 8910
Email: hello@roboxdesign.co.uk



Important Installation Note:

While our Robox Insulated Tap Boxes are designed for straightforward installation, fitting any wall-mounted enclosure requires a level of DIY competence, including safe use of drills and appropriate fixings for your wall type. If you are unsure about any aspect of the installation process, or if you don't feel confident working with tools or near your plumbing, we strongly advise consulting a qualified professional. Improper installation could lead to damage to the product, your property, or personal injury.

1.0 DIMENSIONS

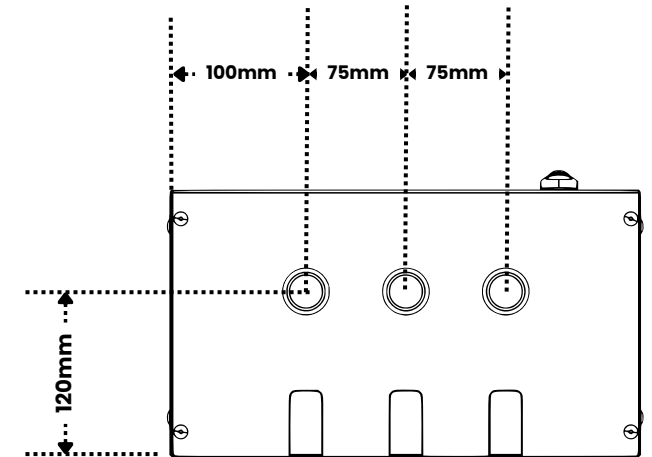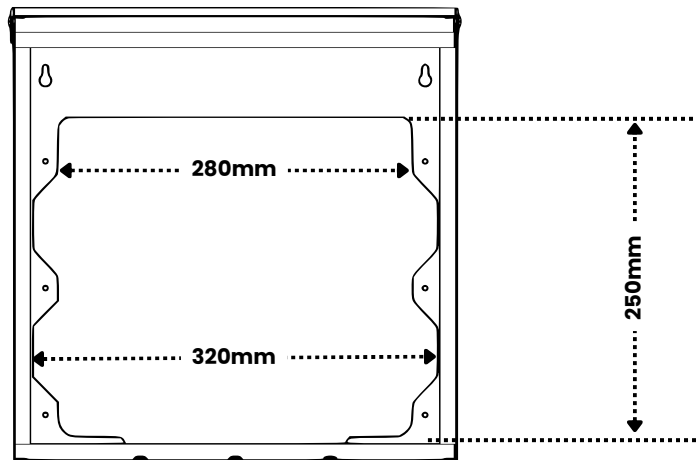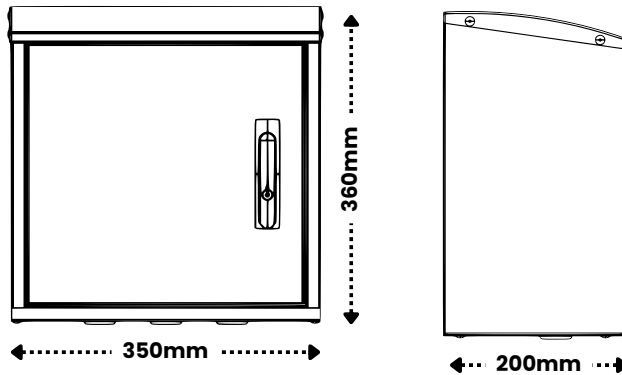


2x 25mm diameter holes with grommet (+1 middle knockout)



3x rectangular pipe knockouts 25mm x 50mm

Door frame/front opening dimensions :
290x280mm

Net weight of Robox Insulated Box unit: 4.4kg

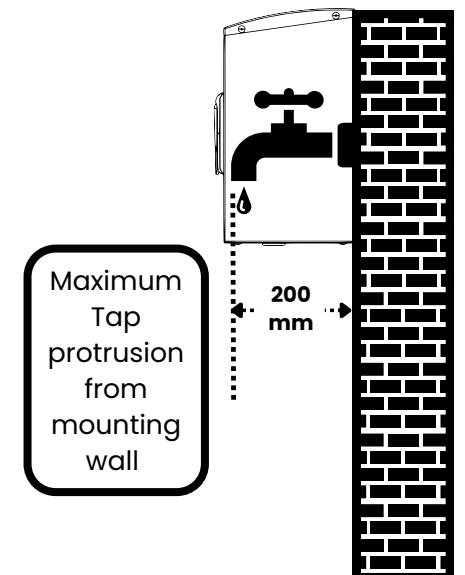

2.0 CONTENTS

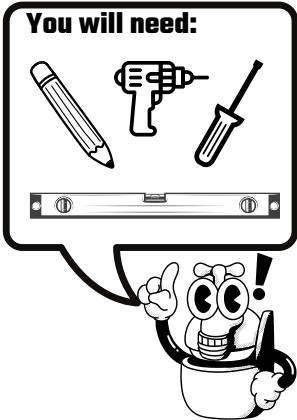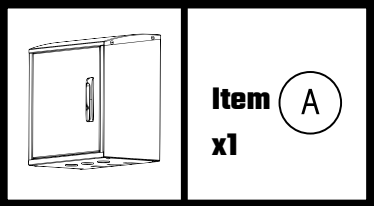

3.0 INSTALLATION AND OPERATION

To keep your RoBox Insulated XL Tap Box warranty valid, the product must be installed strictly in accordance with these instructions and maintained properly throughout its life. This includes using all six supplied screws and wall plugs (or equivalent fixings suitable for your specific wall material) and ensuring the box is perfectly level and fully secured so that it cannot loosen or fall. Failure to install the unit correctly may invalidate the warranty.


Regular cleaning and inspection are also required. Clean the exterior and interior surfaces periodically with a mild detergent solution and wipe dry with a soft cloth. Do not use abrasive cleaners, solvents, bleach or high-pressure washers. At least every six months (or more frequently in exposed or coastal locations), inspect all wall fixings to confirm they remain tight and the box is still firmly mounted to the wall. Tighten any loose screws immediately.

This product is designed as a robust visual and physical deterrent against unauthorized water use and vandalism. However, Robox Design Ltd cannot be held liable for any loss of water, property damage, or successful theft caused by forced entry, aggressive tampering, or the use of heavy tooling to bypass the enclosure.

Robox Design Ltd accepts no responsibility for any injury, loss, or property damage resulting from the misuse, unauthorised modification, or improper installation of this product. The Tap Jaw is designed strictly for tap security; use for any other purpose is at the user's own risk. By proceeding, the user assumes all liability for personal safety and acknowledges that Robox Design Ltd shall not be liable for any direct or consequential damages, including injuries sustained during installation or through accidental or forced contact with the unit.




Ensure correct fixings are used for the wall material

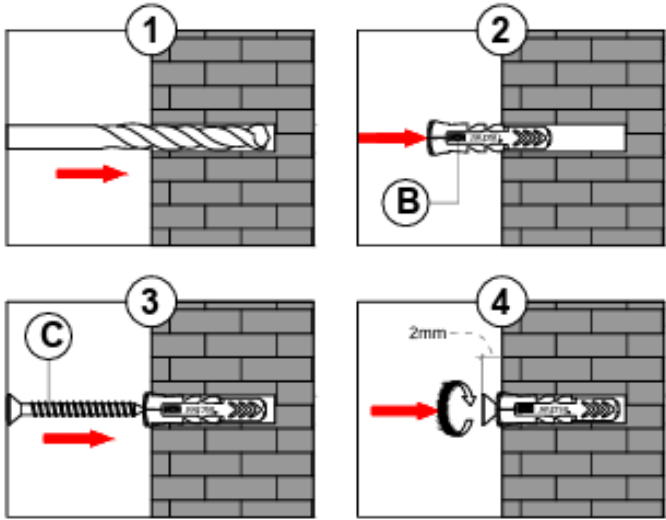

STEP.1


Position box on wall and mark holes. Drill with 6mm bit and add plugs. Ensure box is level.

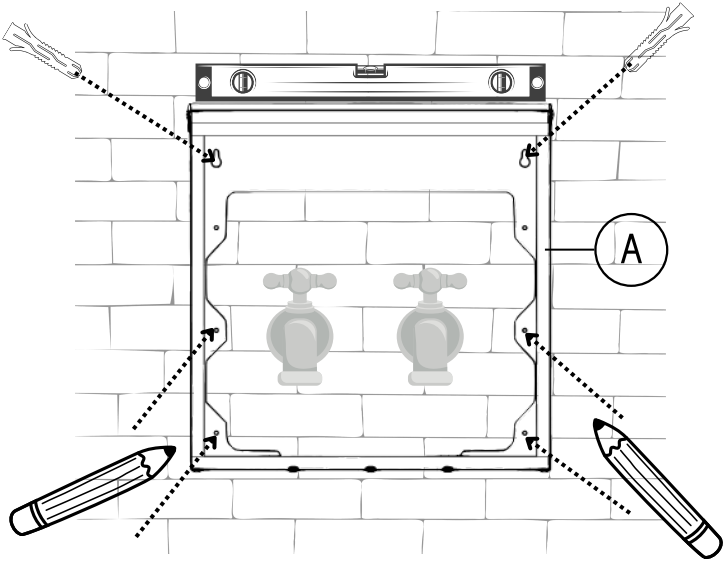

Drill holes for top key hole slot first, add screws and leave proud. Hang box of these screws and mark remaining holes

STEP.2

Reposition box on wall on top screws, pull down to ensure keyhole slots engage. Recheck level. Add remaining screws and fully tighten

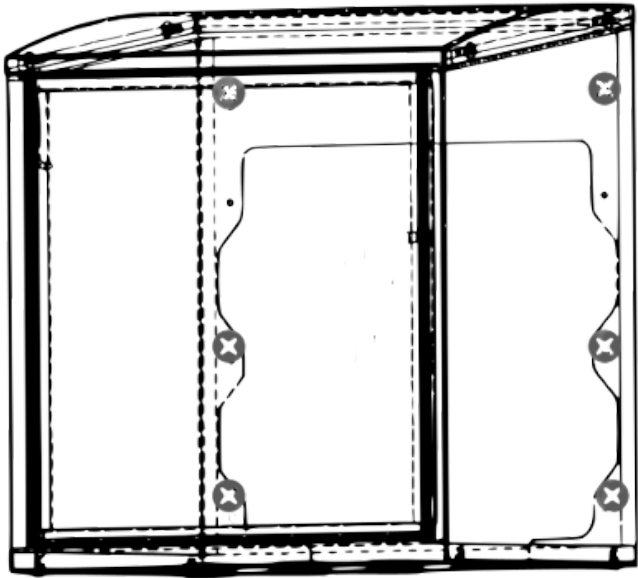

© Robox Design Ltd.
Robox Insulated is a registered trade mark. RBXL - INS- 2026V2