# Verbatim LED GU10 8.0W-79W D 3000K 35D 570LM

## 3000K Warm White 620 LM DIM

- GU10 Socket
- 220-240V
- 40,000 hours Lifetime
- Dimmable
- 90% Energy Saving
- Luminous Flux: 620 lm
- Equivalent to 79W incandescent bulb

| Product Number | 52351 |
|---|---|
| **General Data** | |
| Lamp Socket | GU10 |
| **Electric Data** | |
| Wattage (W) | 8.0 |
| Wattage Equivalent (W) | 79 |
| Voltage (V) | 220-240 |
| Dimmable | yes |
| Power Factor | ≥ 0.9 |
| Operating Frequency (Hz) | 50/60 |
| **Geometric Data** | |
| Length (mm) | 57 |
| Diameter (mm) | 50 |
| Weight (g) | 56 |
| **Photometric Data** | |
| Luminous Flux (lm) | 620 |
| Luminous Flux 90° Cone (lm) | 570 |
| CRI | 90 |
| CCT (K) | 3000 |
| Luminous Intensity (cd) | 1170 |
| Beam Angle (°) | 35 |
| Luminous Efficacy (lm/W) | 78 |
| Lifetime (hrs) | 40,000 |
| Switching Cycle | 100,000 |
| Operating Temperature | -20°C to 40°C |

19/10/2017

## Photometric Diagrams

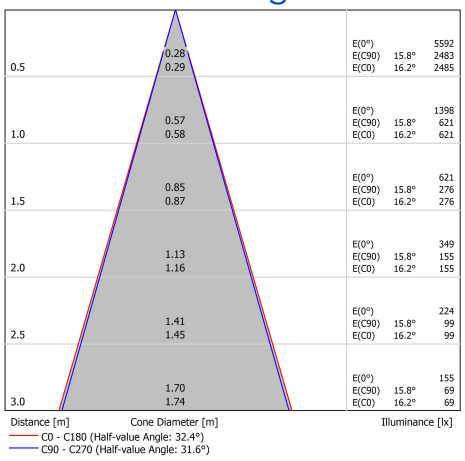


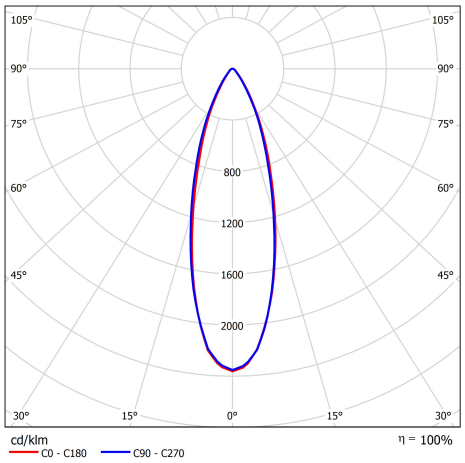


## Energy Rating

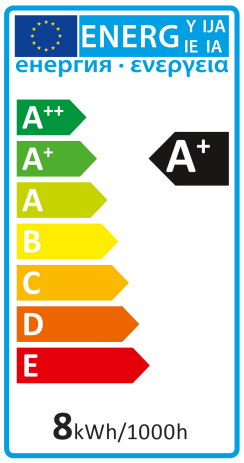


## Technical Packaging Details

**Barcode**
023942523512

**EAN 128**
(02)00023942523512(37)10(91)814

**EAN 14**
50023942523517

**Pack Dimensions(HxWxL)**
67 x 51 x 51 (mm)

**Pack Weight**
70 (g)

**MOQ**
10

**Carton Dimensions (HxWxL)**
60 x 145 x 280 (mm)

**Cartons/Pallet**
221

**Layers/Pallet**
13

**Units/Pallet**
2210

19/10/2017