

MVL-HF0828M-6MP

1/1.8" 8mm 6MP FA LENS

FA series Lens are optimized for machine vision light sources and sensors, with high resolution, excellent image uniformity, high transmittance and good stability. Featured with fixed focal length, manual aperture and compact size, it is suitable for machine vision industry applications.



Key Features

- High resolution and excellent image uniformity
- Low distortion to ensure measurement accuracy
- Maximum image circle of 1/1.8"
- Easy device integration with compact structure

Order Model

MVL-HF0828M-6MP

Specification


Model		MVL-HF0828M-6MP	
Parameter		Fixed focal length, Manual iris, 6MP, FA Lens	
Focal Length		8mm	C-Mount
F-Number		F2.8~F16	17.526mm
Image Size		Φ9mm(1/1.8")	M27*0.5
Optical Distortion		-0.96%	0.05m
Control	Iris	Manual	Dimension
	Focus	Manual	
Operating Temperature		-10~50°C	Weight
Angle of View		D (8.96mm)	58.5°
		H (7.37mm)	49.3°
		V (4.92mm)	34.0°




Field of View

Working Distance (mm)	Magnification	Extension (mm)	Field of View (mm)			
			1/1.8"		1/2"	
			(7.38mm×4.92mm)		(6.22mm×4.67mm)	
			H	V	H	V
25	-0.201	1	37.61	24.80	31.53	23.52
50	-0.128	1	58.67	38.82	49.27	36.83
75	-0.087		86.21	57.08	72.42	54.14
100	-0.069		108.97	72.22	91.59	68.51
150	-0.048		154.50	102.50	129.94	97.24
200	-0.037		200.05	132.79	168.29	125.98
250	-0.030		245.59	163.08	206.64	154.72
300	-0.026		291.14	193.36	244.99	183.46
350	-0.022		336.69	223.65	283.35	212.20
400	-0.020		382.24	253.94	321.70	240.94
450	-0.017		427.79	284.23	360.06	269.68
500	-0.016		473.34	314.52	398.41	298.42
550	-0.014		518.89	344.81	436.77	327.17
600	-0.013		564.44	375.10	475.12	355.91
650	-0.012		609.99	405.39	513.48	384.65
700	-0.011		655.54	435.68	551.83	413.39
800	-0.010		746.64	496.29	628.54	470.87
900	-0.009		837.74	556.84	705.25	528.35
1000	-0.008		928.84	617.42	781.97	585.84


Dimension

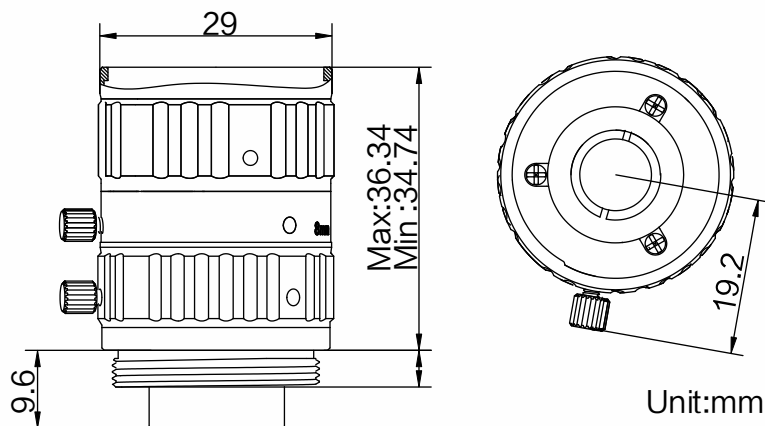


MTF

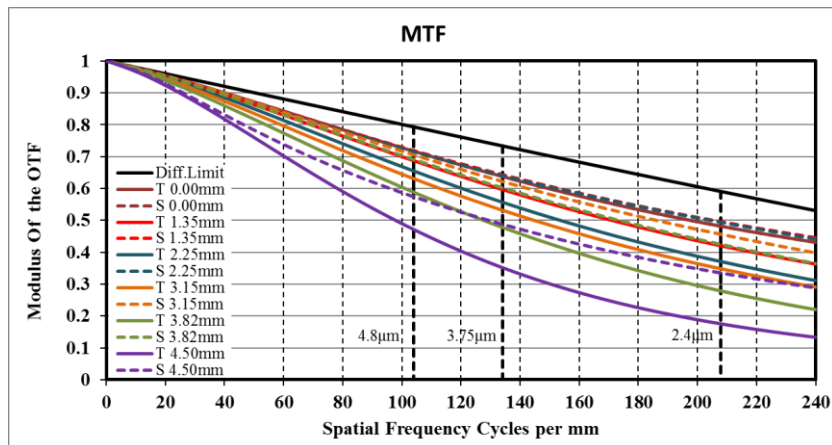


Distortion

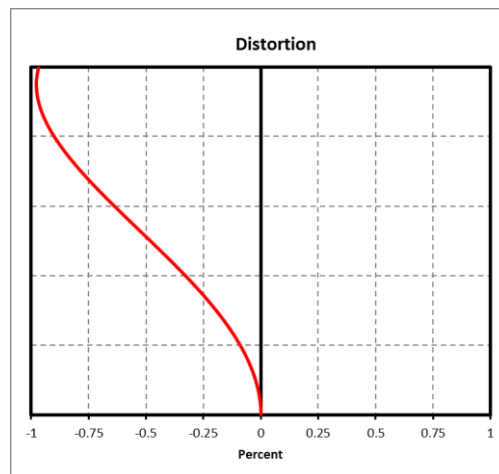

Transmission

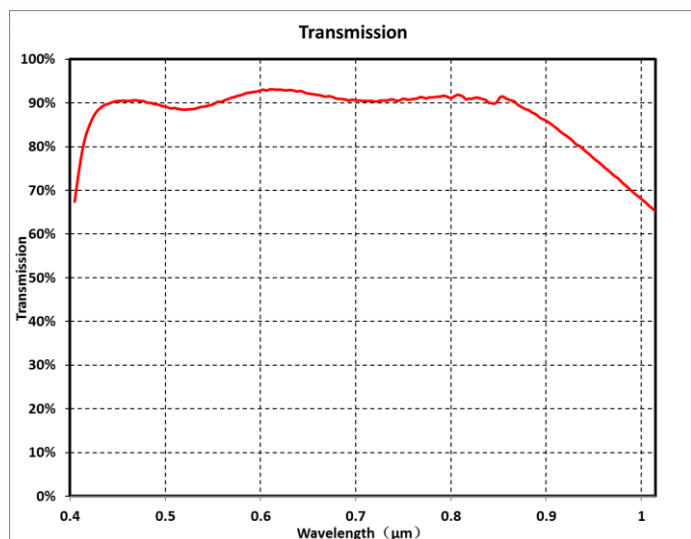

Relative Illumination

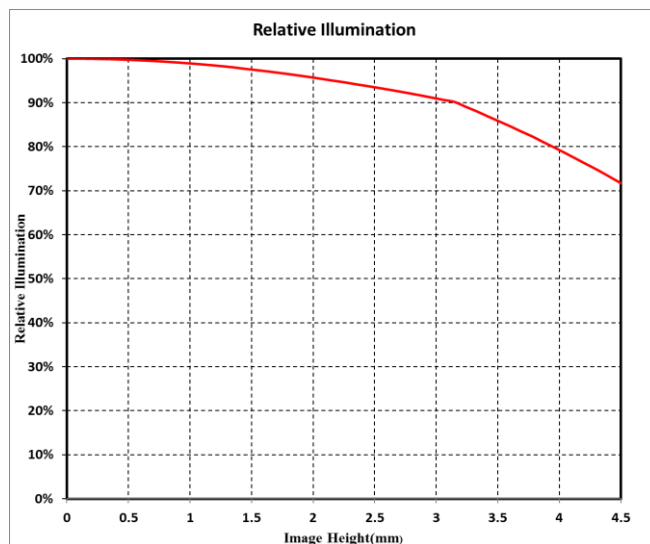

Note: The above curves are the simulate results based on F2.8, $\beta=-0.022$, WD=350 mm.

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com



SCORPION
VISION LIMITED

www.scorpionvision.co.uk +44 (0)1590 679333
sales@scorpion.vision