

**BD_SW_4BC_02 Ducati 899 959 1199 , 4 button , Lap, Up , Select , Down
Handlebar race switch for direct clutch post mounting.**

This switch is intended to replace the standard left hand handlebar switches on Ducati Panigale track bikes which no longer require the light and turn signal controls, yet still require the use of the dash MODE / SET and Lap functions.

The aluminium assembly has been ergonomically designed for easy use and encompasses 4 momentary switches as described below with direct mounting onto the clutch post to save handlebar space.

The offset design moves all functions upward to ensure clearance when using a thumb brake below the handlebars.



Use the two slotted M5 bolts to adjust left / right to best suit the rider.

Electrical connection

No modification of the bike wiring is necessary, this kit plugs directly into the connectors of the bike.

**Function:**

1	White	PIT Speed limit
2	Black	UP function
3	Green	Select (Mode) function
4	Black	DOWN function

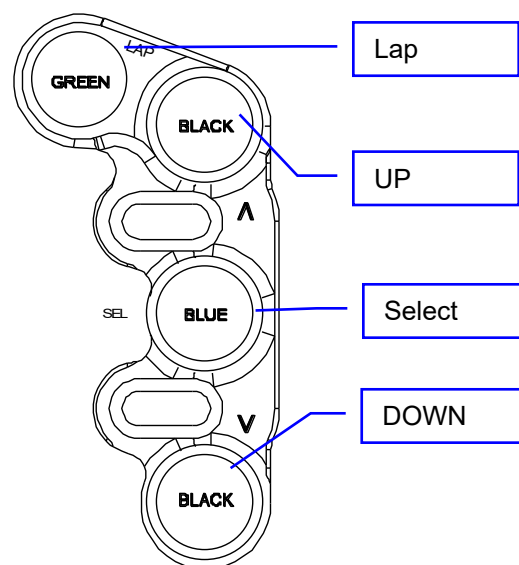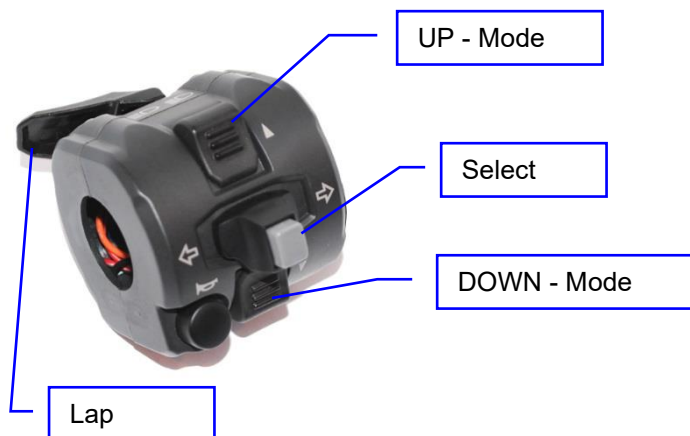**Electrical / Mechanical Characteristics**

Wire..... Type 55 / 24
Switch sealing..... IP67
Housing..... Aluminium

Coating..... Black anodise
Dia (handlebar) 22mm (7/8")
Wire length Same as standard

Ordering Information

Part No.	Connector	Description
BD-SW-4BC-02-A	Plug n Play	4 way handlebar switch to suit Ducati 899 959 1199 + choice of clamp
** - Choose appropriate clamp from the parts listed on page 4. One free clamp per switch assembly		

Mounting - These 'Type C' switches can be mounted directly onto the original clutch assembly replacing the standard 2 bolt clamp with our new clamp (CL-A clamp fits the standard clutch post). Or directly to the handlebar using the BR-G generic clamp as this offers the maximum versatility of installations.

Clamps

CL-A – To suit 32mm in-line clamp bolts – To suit the standard clutch and Brembo RC

CL-K – To suit 36mm in-line bolts as found on Kawasaki

CL-B – To suit 30mm offset bolts – Brembo XR , XA , GP

CL-F – To suit 30mm in-line bolts as found on Accosato / Hel

CL-J – To suit 32mm offset bolts as found on Beringer

BR-G - Generic clamp for direct handlebar mounting.

We will supply clamp **CL-A** to suit the standard bike

These clamp designs use far less space on the handlebar than conventional switch bodies and are fully adjustable.








Mounting - These switches mount directly onto our own clutch post clamp and are adjustable left / right to suit the rider




0.5mm of gap – Used for tightening the clamp.
21.5 > 22.2mm dia bar

IMPORTANT CL-A, CL-B, CL-K
Tighten the UPPER bolt first to achieve metal to metal contact, then use the lower bolt to clamp onto the handlebar

Clamps are also sold separately so there is no need to replace the switch if you change your clutch post.

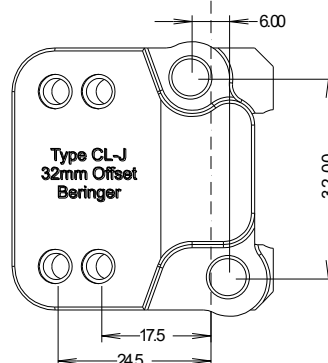

Type G
Generic clamp
Left or Right
Can be used with any of our switch designs



LEFT ←