

BD_SW_2B_xx 2 button handlebar race switches

This switch set may be fitted to any race or road motorcycle. Two individual sealed switches are held in a machined aluminium enclosure offering high levels of crash protection as well as electrical integrity.

The user is free to choose the colour and type of switch in either of the two locations at the time of ordering. Also available without laser engraving.

Although supplied without any connector, we can fit almost any connector as an extra cost.


This switch may only be used for switching a current maximum of 3 ampere.

Not to be used as the primary ignition switch.

**Switch types**

Fill in the form below using the choices indicated, the default selections are shown in (brackets).

- Switch type
 1. Latching = Push to ON, then Push to OFF
 2. Momentary with normally open circuit = Push and hold to ON
 3. Momentary with normally closed circuit = Push and hold to OFF
 4. Alternate momentary with one normally closed circuit and one normally open, these reverse when pressed.
- **Switch colour** – Black / Blue / Green / Red / White / Yellow
- **Text** – Up to 5 text characters can be applied and up to 2 rows

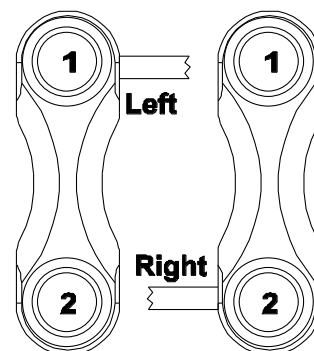

	Switch type	Colour	Text
1			
2			

	Position selection
Left / Right	

Each switch is independently wired and isolated from all other switches. Alternative wiring arrangements are available on request.

Electrical / Mechanical Characteristics

Wire..... Type 55 / 22
Switch sealing..... IP67
Housing..... Aluminium
Coating..... Black anodise
Dia (handlebar)..... 22mm (7/8")

Max width 20.5 mm
Min width at centre 13.5 mm
Weight 80 g
Current max 3 Amp

Ordering Information

Part No.	Connector	Cable	Description
BD-SW-2B-xx	none	500mm	2 way handlebar switch set to suit all race motorcycles