

**BD\_SW\_2B\_xx 2 button handlebar race switches**

This switch set may be fitted to any race or road motorcycle. Two individual sealed switches are held in a machined aluminium enclosure offering high levels of crash protection as well as electrical integrity.

The user is free to choose the colour and type of switch in either of the two locations at the time of ordering. Also available without laser engraving.

Although supplied without any connector, we can fit almost any connector as an extra cost.


This switch may only be used for switching a current maximum of 3 ampere. Typically Kill switch and starter via relay. Not to be used as the primary ignition switch.



**Switch types**

Fill in the form below using the choices indicated, the default selections are shown in (brackets).

- Switch type
  - a. Latching = Push to ON, then Push to OFF
  - b. Momentary with normally open circuit = Push and hold to ON
  - c. Momentary with normally closed circuit = Push and hold to OFF
  - d. Alternate momentary with one normally closed circuit and one normally open, these reverse when pressed.
- Switch colour – Black / Blue / Green / Red / White / Yellow

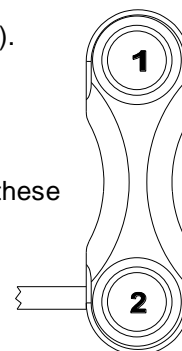

	Switch type	Colour
1		
2		

Each switch is independently wired and isolated from all other switches. Alternative wiring arrangements are available on request.

**Example layout**



**Electrical / Mechanical Characteristics**

Wire..... Type 55 / 24  
 Switch sealing..... IP67  
 Housing..... Aluminium  
 Coating..... Black anodise

Dia (handlebar) .....22mm (7/8")  
 Max width ..... 20.5 mm  
 Min width at centre ..... 13.5 mm  
 Weight ..... 80 g

**Ordering Information**

Part No.	Connector	Cable	Description
BD-SW-2B-xx	none	500mm	2 way handlebar switch set to suit all race motorcycles